

Tehnički list za artikl: AM017850UL

Miniature Circuit Breaker AMPARO 5kA, C 50A, 3+N, UL1077

Product category AM10, Neutral on right side, Product standard EN 60898-1, IEC 60898-1, UL1077



Schrack Info

- Contact position indicator
- Lift und Clamp terminals on both sides
- Back terminal design for safe connection
- Neutral on right side
- Terminal cross-section: 1-25mm²
- Snap-on mounting for DIN rail according to EN 60715
- Compliant to the product standard UL1077


Tehnički podaci

Norma	IEC 60898-1 UL1077 EN 60898-1
Nazivna frekvencija (Hz)	50/60
Karakteristika okidanja	C
Nazivna struja (A)	50



Tehnički podaci - nastavak

Polovi	3+N
Nazivna prekidna moć	10 kA (IEC/EN 60898) , 5 kA (UL 1077)
Nazivni udarni podnosivi napon	6kV
Klasa selektivnosti	3
Ispitni napon (V)	2000
Stupanj onečišćenja	Stupanj 2
Disipacija snage (W)	16,80
Unutarnji otpor	50A: 1.226mΩ
Životni vijek, električni	4000 Operations
Životni vijek, mehanički	20000 radnih ciklusa
IP stupanj zaštite	IP20
Presjek stezaljke (mm²)	1 - 25
Veličina stezaljke za sabirnicu	10 mm²/16 mm²
Materijal vodiča	Copper
Tip stezaljke	Double function clamp / pin and fork busbar
Kalibracija-Temperatura (°C)	30
Temperaturno područje - Pogon (°C)	-25 do +70
Ambient Temperature - nominal Tripping (°C)	-5 to +40
Način montaže	On DIN rail according to EN 60715 (35mm) via quick mounting clip
Dodatni pribor	AM900099--;BSB90113-A;BSB90114-A;AM900008--;AM900006--;AM900005--
Položaj ugradnje	bilo koji
Certifikati	UL 1077, File No. E195102

Circuit diagram

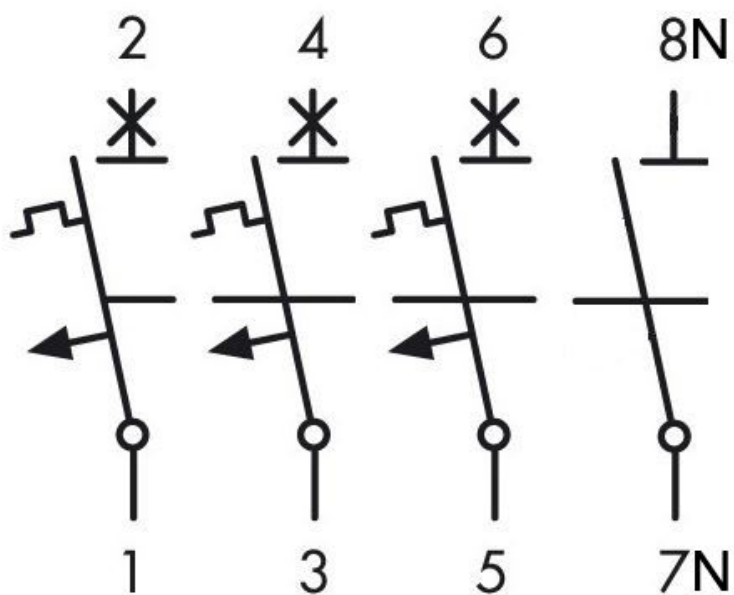

Dimensions

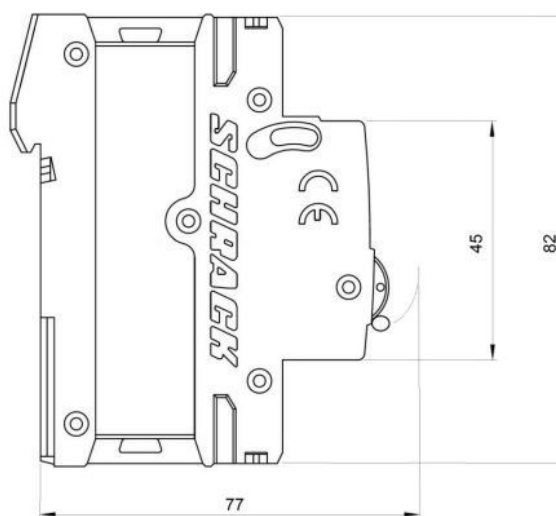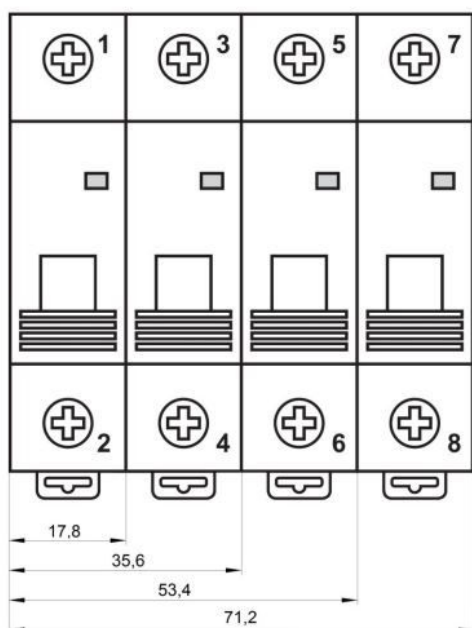


Let-through energy characteristic

I^2t Durchlassenergie/ let-through energy



Tripping characteristic according to IEC 60898

Kennlinie C

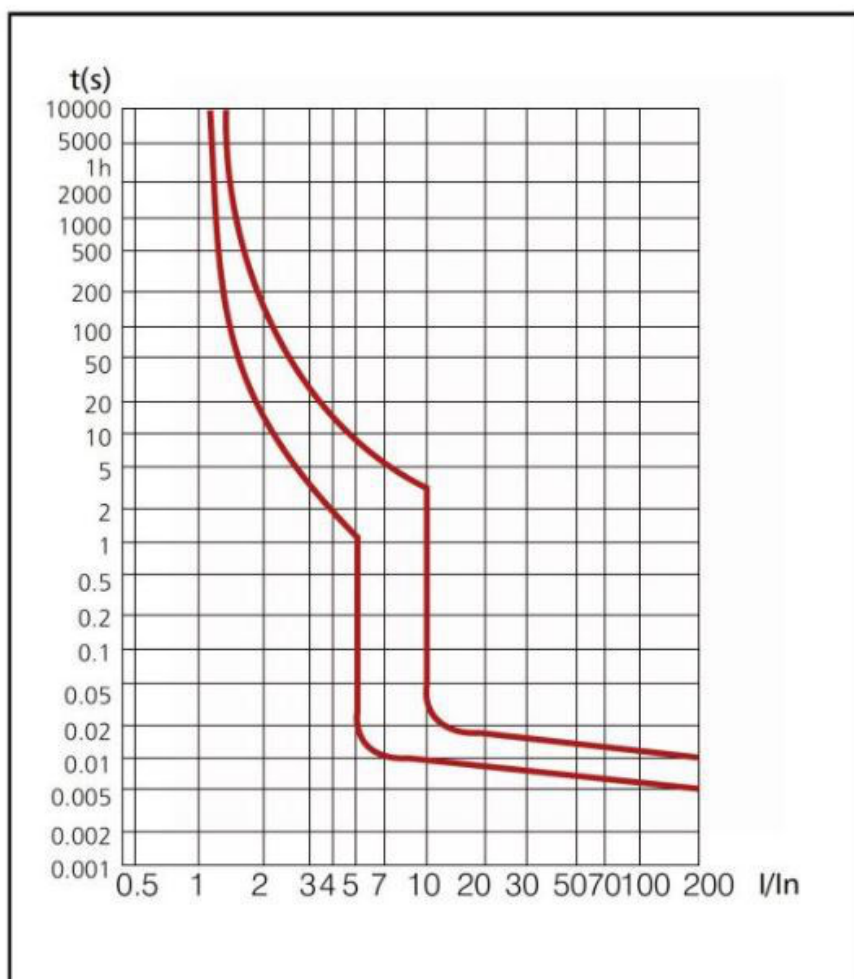

Short-circuit selectivity to D/D0 and cylindrical fuse links with characteristic curve gG/gL

In	16A	20A	25A	35A	50A	63A	80A	100A
≤2A	0,5 kA	0,8 kA	1,6 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA
3A	0,5 kA	0,8 kA	0,9 kA	2,2 kA	4,5 kA	10,0 kA	10,0 kA	10,0 kA
4A	0,5 kA	0,6 kA	0,8 kA	1,8 kA	3,6 kA	9,7 kA	10,0 kA	10,0 kA
6A	0,5 kA	0,5 kA	0,6 kA	1,4 kA	2,4 kA	5,5 kA	10,0 kA	10,0 kA
10A	-	0,5 kA	0,6 kA	1,3 kA	2,0 kA	3,6 kA	5,4 kA	10,0 kA
13A	-	-	-	1,3 kA	1,9 kA	3,3 kA	5,0 kA	9,4 kA
16A	-	-	-	1,2 kA	1,8 kA	3,2 kA	4,4 kA	8,0 kA
20A	-	-	-	1,2 kA	1,8 kA	3,1 kA	4,1 kA	7,0 kA
25A	-	-	-	-	1,7 kA	2,8 kA	3,8 kA	6,5 kA
32A	-	-	-	-	-	2,7 kA	3,7 kA	6,2 kA
40A	-	-	-	-	-	-	3,5 kA	5,9 kA
50A	-	-	-	-	-	-	-	5,5 kA
63A	-	-	-	-	-	-	-	-

Short-circuit selectivity to NH fuses with characteristic curve gG/gL

In	16A	20A	25A	35A	40A	50A	63A	80A	100A	125A	160A
≤2A	0,5 kA	0,6 kA	1,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA
3A	0,5 kA	0,5 kA	0,7 kA	1,8 kA	2,6 kA	4,7 kA	6,6 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA
4A	0,5 kA	0,5 kA	0,7 kA	1,5 kA	2,1 kA	3,6 kA	5,0 kA	10,0 kA	10,0 kA	10,0 kA	10,0 kA
6A	0,5 kA	0,5 kA	0,5 kA	1,2 kA	1,5 kA	2,5 kA	3,3 kA	5,7 kA	10,0 kA	10,0 kA	10,0 kA
10A	-	-	0,5 kA	1,0 kA	1,4 kA	2,0 kA	2,5 kA	3,8 kA	8,0 kA	10,0 kA	10,0 kA
13A	-	-	-	1,0 kA	1,3 kA	1,9 kA	2,4 kA	3,6 kA	7,0 kA	10,0 kA	10,0 kA
16A	-	-	-	1,0 kA	1,3 kA	1,8 kA	2,3 kA	3,3 kA	6,0 kA	8,8 kA	10,0 kA
20A	-	-	-	1,0 kA	1,2 kA	1,7 kA	2,2 kA	3,2 kA	5,5 kA	7,7 kA	10,0 kA
25A	-	-	-	-	-	1,6 kA	2,1 kA	3,0 kA	5,2 kA	7,3 kA	10,0 kA
32A	-	-	-	-	-	-	2,1 kA	2,9 kA	5,0 kA	7,0 kA	10,0 kA
40A	-	-	-	-	-	-	-	2,8 kA	4,8 kA	6,7 kA	10,0 kA
50A	-	-	-	-	-	-	-	-	4,5 kA	6,3 kA	9,5 kA
63A	-	-	-	-	-	-	-	-	-	5,9 kA	8,4 kA

Short-circuit selectivity to circuit breaker size 1

I _{cu} = 25kA (50 kA)	40A	50A	63A	80A	100A	125A
1A	15 kA	15kA	15kA	15kA	15kA	15kA
2A	2 kA	15 kA	15 kA	15 kA	15 kA	15 kA
3A	1,2 kA	2 kA	3 kA	3 kA	10 kA	15 kA
4A	1,2 kA	2 kA	3 kA	3 kA	8 kA	15 kA
6A	1,2 kA	2 kA	2,5 kA	3 kA	5 kA	10 kA
10A	1,2 kA	1,5 kA	2 kA	2 kA	4 kA	10 kA
13A	1 kA	1,5 kA	2 kA	2 kA	4 kA	10 kA
16A	1 kA	1,2 kA	1,5 kA	2 kA	3 kA	8 kA
20A	0,8 kA	1,2 kA	1,5 kA	1,5 kA	3 kA	8 kA
25A	0,7 kA	1,2 kA	1,5 kA	1,5 kA	3 kA	7 kA
32A	-	1,2 kA	1 kA	1,5 kA	2 kA	6 kA
40A	-	-	1 kA	1,5 kA	2 kA	5 kA
50A	-	-	-	1,2 kA	1,5 kA	4 kA
63A	-	-	-	-	1,5 kA	3 kA

Short-circuit selectivity to circuit breaker size 2

I _{cu} =25kA (50kA), (100kA), (150kA)	40A	50A	63A	80A	100A	125A	160A	200A	250A
1A	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA
2A	3 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA	15 kA
3A	1,5 kA	1,5 kA	3 kA	5 kA	15 kA	15 kA	15 kA	15 kA	15 kA
4A	1,2 kA	1,5 kA	3 kA	4 kA	15 kA	15 kA	15 kA	15 kA	15 kA
6A	1,2 kA	1,5 kA	2,5 kA	3 kA	15 kA	15 kA	15 kA	15 kA	15 kA
10A	1 kA	1,5 kA	2,5 kA	3 kA	10 kA	10 kA	10 kA	10 kA	10 kA
13A	1 kA	1,2 kA	2 kA	3 kA	10 kA	10 kA	10 kA	10 kA	10 kA
16A	1 kA	1,2 kA	1,5 kA	2,5 kA	10 kA	10 kA	10 kA	10 kA	10 kA
20A	1 kA	1,2 kA	1,5 kA	1,5 kA	10 kA	10 kA	10 kA	10 kA	10 kA
25A	0,8 kA	1kA	1,5 kA	2 kA	10 kA	10 kA	10 kA	10 kA	10 kA
32A	-	1 kA	1,5 kA	2 kA	8 kA	8 kA	8 kA	8 kA	10 kA
40A	-	-	1,2 kA	1,5 kA	7 kA	7 kA	7 kA	7 kA	10 kA
50A	-	-	-	1,5 kA	6 kA	6 kA	6 kA	6 kA	10 kA
63A	-	-	-	-	6 kA	6 kA	6kA	6 kA	10 kA

Influence of the ambient temperature on the thermal tripping behavior

I _n [A]	Umgebungstemperatur T [°C]											
	-35	-30	-20	-10	0	10	20	30	40	50	60	70
1	1,30	1,26	1,23	1,19	1,15	1,11	1,05	1,00	0,96	0,93	0,88	0,83
2	2,60	2,52	2,46	2,38	2,28	2,20	2,08	2,00	1,92	1,86	1,76	1,66
3	3,90	3,78	3,69	3,57	3,42	3,30	3,12	3,00	2,88	2,79	2,64	2,49
4	5,20	5,04	4,92	4,76	4,56	4,40	4,16	4,00	3,84	3,76	3,52	3,32
6	7,80	7,56	7,38	7,14	6,84	6,60	6,24	6,00	5,76	5,64	5,28	4,98
10	13,20	12,70	12,50	12,00	11,50	11,10	10,60	10,00	9,60	9,30	8,90	8,40
16	21,12	20,48	20,00	19,20	18,40	17,76	16,96	16,00	15,36	14,88	14,24	13,44
20	26,40	25,60	25,00	24,00	23,00	22,20	21,20	20,00	19,20	18,60	17,80	16,80
25	33,00	32,00	31,25	30,00	28,75	27,75	26,50	25,00	24,00	23,25	22,25	21,00
32	42,56	41,28	40,00	38,72	37,12	35,52	33,92	32,00	30,72	29,76	28,16	26,88
40	53,20	51,20	50,00	48,00	46,40	44,80	42,40	40,00	38,40	37,20	35,60	33,60
50	67,00	65,50	63,00	60,50	58,00	56,00	53,00	50,00	48,00	46,50	44,00	41,50
63	83,79	81,90	80,01	76,86	73,71	70,56	66,78	63,00	60,48	58,90	55,44	52,29

Number of possible wires

Querschnitt [mm ²]	Anzahl der starren Einzelleiter eindrätig					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1,5	+	+	+	+	+	+
2,5	+	+	+	-	-	-
4	+	+	+	-	-	-
6	+	+	+	-	-	-

Querschnitt [mm ²]	Anzahl der starren Einzelleiter mehrdrätig					
	1	2	3	4	5	6
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Querschnitt [mm ²]	Anzahl der Einzelleiter feindrätig (ohne Aderendhülse)					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1,5	+	+	+	+	+	+
2,5	+	+	+	+	-	-
4	+	+	+	-	-	-
6	+	+	-	-	-	-
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Querschnitt [mm ²]	Anzahl der Einzelleiter feindrätig (mit Aderendhülse)					
	1	2	3	4	5	6
1	+	-	-	-	-	-
1,5	+	-	-	-	-	-
2,5	+	-	-	-	-	-
4	+	-	-	-	-	-
6	+	-	-	-	-	-
10	+	-	-	-	-	-
16	+	-	-	-	-	-
25	-	-	-	-	-	-

Tabela artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Miniature Circuit Breaker AMPARO 5kA, C 50A, 3+N, UL1077		
Product category AM10, Neutral on right side, Product standard EN 60898-1, IEC 60898-1, UL1077		AM017850UL
Dodatni pribor		
Pomoćni kontakt, 1 C/O kontakt, serija AMPARO, uskočna montaža		AM900099
Tip AM6, Norma EN 60947-5-1:2017		
Sabirnica, viličasta, 3P, 10mm ² korak 17,8mm 1m	480	BSB90113-A
fiksne duljine, nije moguće skraćivanje		
Sabirnica, viličasta, 3P, 16mm ² korak 17,8mm 1m	670	BSB90114-A
fiksne duljine, nije moguće skraćivanje		
Podnaponski isklonik 230VAC AMPARO		AM900008
Tip AM6, Norma EN 60947-5-1:2004 + A1:2009		
Daljinski okidač 230v/400v ac, serija AMPARO, bočna montaža		AM900006
Tip AM6, Norma EN 60947-5-1:2004 + A1:2009		
Daljinski isklonik 24V AC/DC AMPARO		AM900005
Tip AM6, Norma EN 60947-5-1:2004 + A1:2009		