

Tehnički list za artikl: BK003524--

Nazidni razdjelnik bez vrata, 4-redni, 48 modula, IP30

650x310x96mm (VxŠxD), IP30, klasa izolacije II, nazivna struja: 63A, nazivni napon: 400V AC, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25°C do 40°C, RAL 9010 (bijeli)



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS without doors
- Installation of sheet steel door with door clip possible
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection IP40, Impact resistance: IK08
- RAL9003 Signal white



Tehnički podaci

Neto širina (mm)	310,00
------------------	--------

Tehnički podaci - nastavak

Neto visina (mm)	650,00
Neto dubina (mm)	96,00
Neto masa (kg)	2,54
EAN	9004840970272
Disipacija snage (W)	-36,00
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
Bezhalogena	Da
Izvedba/tip	Nazidni bez vrata
Broj redova	4
Modula u 1 redu	12
IP stupanj zaštite	IP40
Boja	RAL 9003 (signalno bijela)

Podatkovna tablica: Nazidni razdjelnik bez vrata, 4-redni, 48 modula, IP30

Artikelnummer	A[mm]	B[mm]	C[mm]	D[mm]	E[mm]	Reihen	TE	N-Klemme[mm²]	PE-Klemme[mm²]	Verlustleistung[W]]*
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										
BK003521										

Mjerne skice: Nazidni razdjelnik bez vrata, 4-redni, 48 modula, IP30

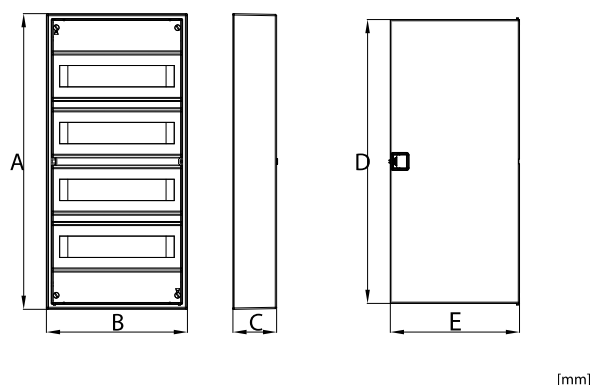


Tabela artikla

OPIS	KAT. BROJ
Nazidni razdjelnik bez vrata, 4-redni, 48 modula, IP30 650x310x96mm (VxŠxD), IP30, klasa izolacije II, nazivna struja: 63A, nazivni napon: 400V AC, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25°C do 40°C, RAL 9010 (bijeli)	BK003524
Dodatni pribor	
Vrata za razdjelnik BK003524, čelični lim, RAL 9010 283x618x12mm (ŠxVxD)	BK003504