


Tehnički list za artikl: IL198285-A

Metering insert 2-45G compl. 4 cou. pl. front pl. st. STMK

Frontblende Stahlblech

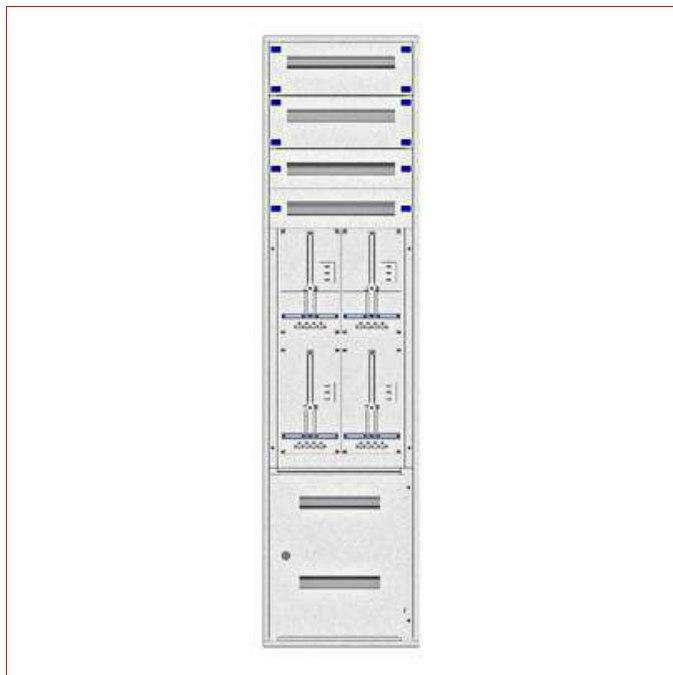

Tehnički podaci

Neto širina (mm)	500,00
Neto visina (mm)	2.070,00
Neto dubina (mm)	102,00
EAN	9004840967340
Tip	Umetak za razdjelnik s brojilom
Regija	Štajerska
Umetci	Prednja maska plastična
Boja	RAL 7035
Širina brojila	2
Visinska jedinica	45
Redova brojila	2
Mjesta za brojila	4
Daljni redovi	4
Pokrovna ploča	Čelik
Osnovna oznaka	Umetak

Tabela artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Metering insert 2-45G compl. 4 cou. pl. front pl. st. STMK Frontblende Stahlblech		IL198285-A
Dodatni pribor		
Set za uzemljenje 300mm P/F 6mm Ž-Z Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824