


Tehnički list za artikl: BSA90151--

## Sabirnica, 1xRCCB N+3, 4xMCB N+1 12MW

Compact-Busbar, suitable for products of AMPARO series, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required




### Tehnički podaci

|                                                                  |                                   |
|------------------------------------------------------------------|-----------------------------------|
| Presjek (mm <sup>2</sup> )                                       | 10                                |
| Norma                                                            | EN 61439-1                        |
| Max. current beginning                                           | 65A                               |
| Max. current middle                                              | 100A                              |
| Materijal                                                        | E-Cu-ETP                          |
| Izolacijski materijal                                            | Polivinilklorid (PVC)             |
| Bezhalogena                                                      | no                                |
| Prenaponska kategorija                                           | 3                                 |
| Nazivni udarni podnosivi napon [Uimp] (V)                        | 4kV                               |
| Nazivni napon                                                    | 240/415VAC/DC                     |
| Stupanj onečišćenja                                              | Stupanj 2                         |
| Otpor praćenja                                                   | CTI 600                           |
| Disipacija snage (W)                                             | 4,50                              |
| Temperature resistance (°C)                                      | PVC up to 80°C; PC/ABS up to 90°C |
| Nazivna struja kratkog spoja                                     | ≤50kA                             |
| Maks. dozvoljeni predosigurač za zaštitu od kratkog spoja (A gG) | 100A gL                           |
| Min. zračni razmak                                               | ≤3,0mm                            |

## Tehnički podaci - nastavak

|                        |                                       |
|------------------------|---------------------------------------|
| Min. creepage distance | ≤5,0mm                                |
| IP stupanj zaštite     | IP20                                  |
| Reakcija na vatru      | PV/ABS V-0 at 1,5mm according to UL94 |

## Mjerne skice: Sabirnica, 1xRCCB N+3, 4xMCB N+1 12MW

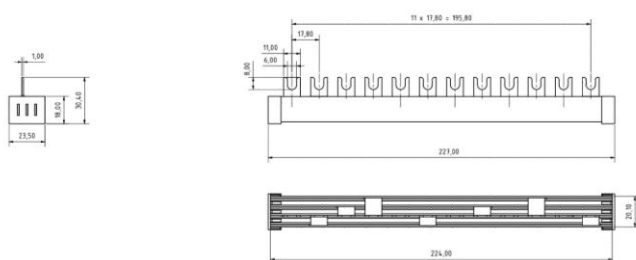

## Tabela artikla

| OPIS                                                                                                                                                                                                 | KAT. BROJ |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Sabirnica, 1xRCCB N+3, 4xMCB N+1 12MW<br>Compact-Busbar, suitable for products of AMPARO series, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required | BSA90151  |
| <b>Dodatni pribor</b>                                                                                                                                                                                |           |
| Zaštitni pokrov žuti<br>Cover for reserve spaces on the busbar                                                                                                                                       | BSB00303  |
| Krajnji komad za sabirnicu 4-pol                                                                                                                                                                     | BSA90118  |