

Tehnički list za artikl: BSB00058-A

Sabirnica, 6 x MCB 1+N, 4-pol, 12MW, 10mm²

Compact-Busbar, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required




Tehnički podaci

Presjek (mm ²)	10
Norma	EN 61439-1
Max. current beginning	63A
Max. current middle	100A
Materijal	E-Cu-ETP
Izolacijski materijal	PC
Bezhalogena	According DIN EN 50267-2-2
Temperaturno područje - Pogon (°C)	do 125
Ispitivanje na žarnu nit (°C)	960
Prenaponska kategorija	3
Nazivni udarni podnosivi napon [Uimp] (V)	4kV
Nazivni napon	400V-AC
Nazivna prekidna moć	100Agl / 25 kA
Dielektrična čvrstoća	36kV/mm
Stupanj onečišćenja	Stupanj 2
Uvjeti okoline	IEC 68-2


Tehnički podaci - nastavak

Klasa zapaljivosti	2
Otpor praćenja	CTI 600
Disipacija snage (W)	4,50

Mjerne skice: Sabirnica, 6 x MCB 1+N, 4-pol, 12MW, 10mm²

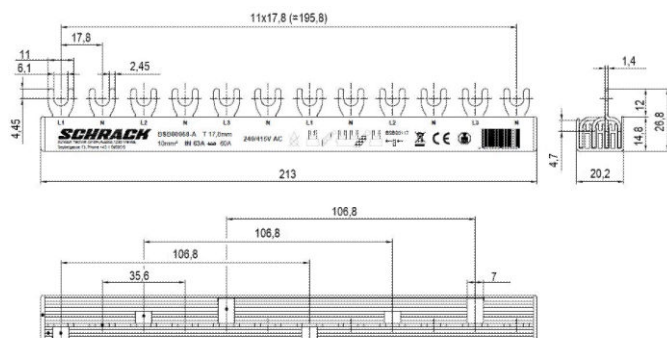

Dijagram: Sabirnica, 6 x MCB 1+N, 4-pol, 12MW, 10mm²

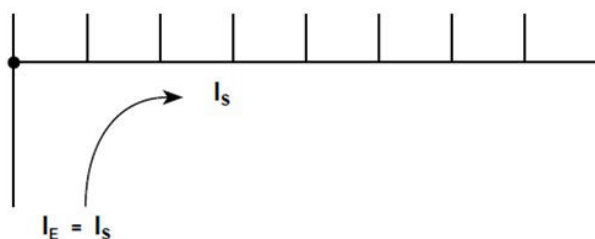

Dijagram: Sabirnica, 6 x MCB 1+N, 4-pol, 12MW, 10mm²

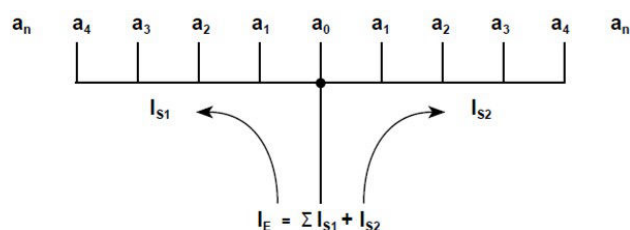


Tabela artikla

OPIS	KAT. BROJ
Sabirnica, 6 x MCB 1+N, 4-pol, 12MW, 10mm ² Compact-Busbar, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required	BSB00058-A
Dodatni pribor	
Zaštitni pokrov žuti Cover for reserve spaces on the busbar	BSB00303
Završetak za sabirnicu 4-pol, 10mm ² za izoliranje kraja šine	BSB00117-A