

Tehnički list za artikl: BSB00060--

Sabirnica, viličasta, 1xFID 4P, 4xSPD, 1xMCB 3+N, 16mm²

8TE(TE=18mm), fiksne duljine, nije moguće skraćivanje



Schrack-Info

- Compact-Busbar for wiring of devices with: Dual-function terminal, screw terminal, screw connection, bracket terminal, flat terminal
- Division unit 17.8mm
- 8 MW
- Phase sequence: L1, L2, L3, N, L1, L2, L3, N (other applications possible)
- No end caps required


Tehnički podaci

Presjek (mm ²)	10
Norma	EN 61439-1
Max. current beginning	80A
Max. current middle	130A
Materijal	E-Cu-ETP
Izolacijski materijal	PC
Bezhalogena	According DIN EN 50267-2-2
Temperaturno područje - Pogon (°C)	do 125
Ispitivanje na žarnu nit (°C)	960


Tehnički podaci - nastavak

Prenaponska kategorija	3
Nazivni udarni podnosivi napon [Uimp] (V)	4k
Nazivni napon	400V-AC
Nazivna prekidna moć	100Agl / 25 kA
Dielektrična čvrstoća	36kV/mm
Stupanj onečišćenja	Stupanj 2
Uvjeti okoline	IEC 68-2
Klasa zapaljivosti	2
Otpor praćenja	CTI 600
Disipacija snage (W)	3,00

Dimensions in mm

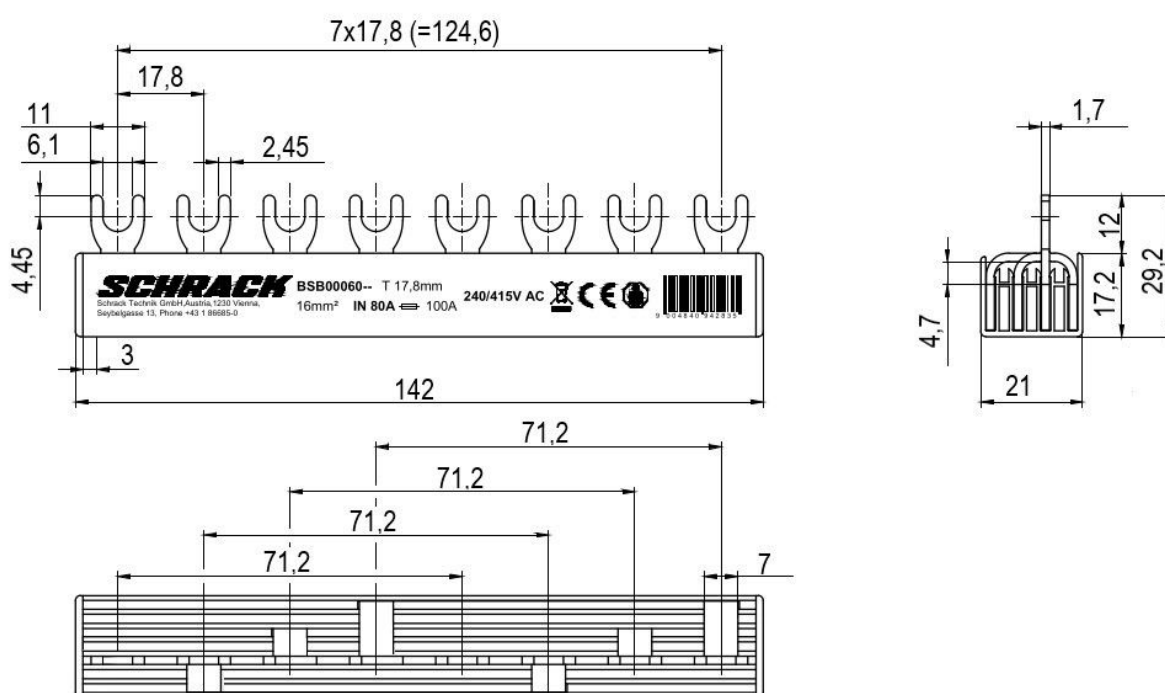

Feeding at beginning or end of busbar

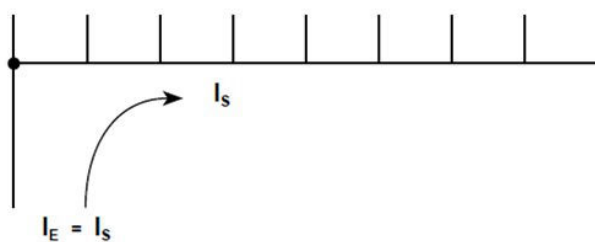

Other feedings

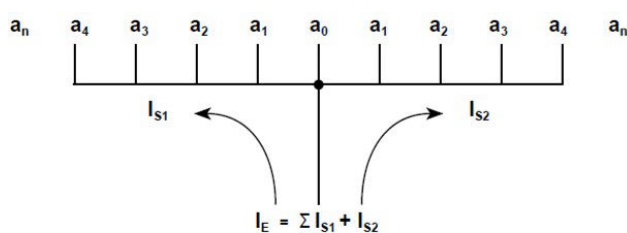


Tabela artikla

OPIS	KAT. BROJ
Sabirnica, viličasta, 1xFID 4P,4xSPD, 1xMCB 3+N, 16mm ² 8TE(TE=18mm), fiksne duljine, nije moguće skraćivanje	BSB00060
Dodatni pribor	
Zaštitni pokrov žuti Cover for reserve spaces on the busbar	BSB00303