

Tehnički list za artikl: INSE1380--

Glavna sklopka, 3-pola, učvršćenje s 4 vijka, 80A

Izvedba/tip Glavna sklopka, Nazivna struja 80A, Polovi 3, IP stupanj zaštite IP65 (front), IP10 (output terminals), IP20 (supply terminals with terminal cover and Cable cross-section bigger than 6mm²)



Tehnički podaci

Izvedba/tip	Glavna sklopka
Nazivna struja (A)	80
Polovi	3
Način montaže	front mount
Norma	IEC 60947, EN 60947, VDE 0660
Nazivni napon izolacije [Ui] (V)	690
Nazivni udarni podnosivi napon [Uimp] (V)	6000
Nazivna kratkotrajno podnosiva struja Icw	1000
Nazivna struja kratkog spoja	10kA @ 440V / 6kA @ 690V
Kratkospojna zaštita, maks. rastalni osigurač	80
Frekvencija (Hz)	50/60


Tehnički podaci - nastavak

Operating Current	AC-21A - 690V - 80A AC-23A - 690V - 22A AC-23A - 400V - 43A AC-3 - 400V - 43A AC-3 - 690V - 22A
Switching Capacity	AC-23A - 400V - 30kW AC-23A - 690V - 22kW AC-3 - 690V - 18.5kW AC-3 - 400V - 22kW
According to UL 508 / CSA	
Tip priključka	UL/CSA - AWG 14-6
Radni napon AC (V)	600
Thermal rated continuous current (A)	80
Active Power	3x240VAC - 15Hp 3x600VAC - 50Hp 3x480VAC - 40Hp 1x120VAC - 10Hp
Priključak	
Konvencionalna termička struja Ith (A)	80
MOment pritezanja (Nm)	2,50
Presjek priključnih vodiča, višezilni kabel (mm ²)	2,5-35
Presjek priključnih vodiča, Jednožični (mm ²)	2,5-35
Presjek priključnih vodiča, finožični kabel s tuljkom (mm ²)	2,5-16
Retrofit contacts	
Pomoćni kontakti	Maximum 2x INSHK002-- permitted. 1x INSHK002-- can be snapped on to the left of the main contact and 1x INSHK002-- to the right of the main contact. Maximum configuration 2x NO contact / 2x NC contact. Switching behavior is the same regardless of whether the auxiliary contact is snapped on to the left or right of the main contact.
Neutral conductor contacts	ATTENTION! If this 3-pole switch is converted to a 4-pole switch using neutral conductor contact INSNK022--, no additional auxiliary contact can be snapped onto the N contact. On the other side, auxiliary contact INSHK002-- can be used as normal. For further details, see Auxiliary contact and N contact overview
Radna temperatura	-25°C to +55°C
Mehanički životni vijek	100000 switching cycles
Gubitak snage po polu (W)	5,50
Zaštita od dodira	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP stupanj zaštite	IP65 (front), IP10 (output terminals), IP20 (supply terminals with terminal cover and Cable cross-section bigger than 6mm ²)
Lockable	With 3 locks, each with a shackle lock diameter of 4-8 mm
Neto duljina (mm)	92,50
Neto širina (mm)	66,40




Tehnički podaci - nastavak

Neto visina (mm)	66,40
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	55

Schaltbild INSE1380--




Maßbild INSE1380--

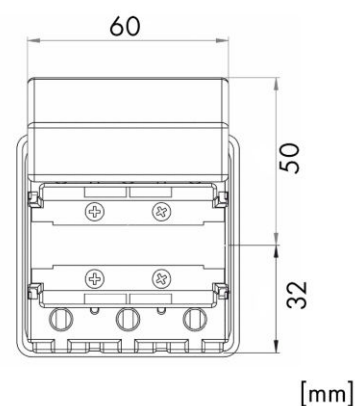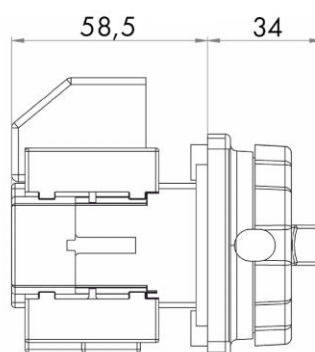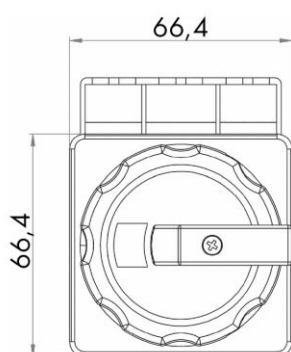

[mm]

Bohrbild INSE1380--

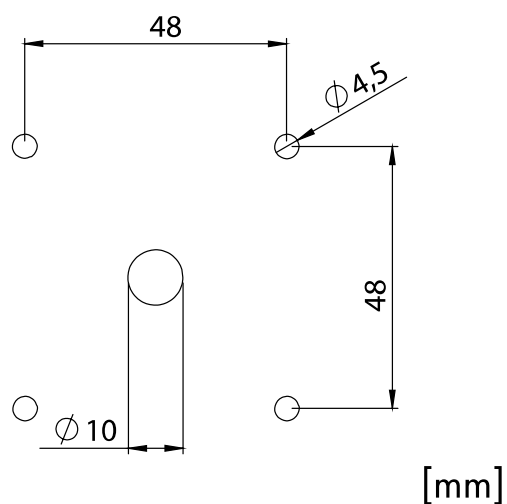

Montageanleitung INSHK Hilfskontakte bei Verwendung von INSNK Neutralleiterkontakte

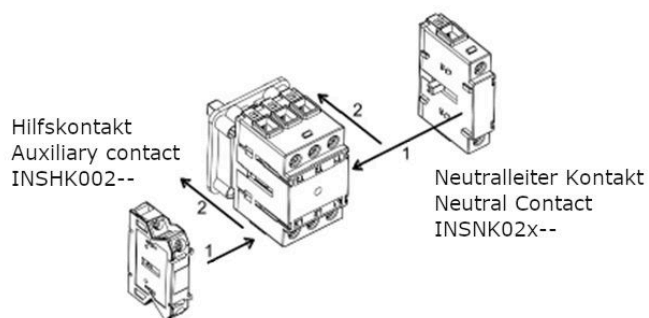


Tabela artikla

OPIS	KAT. BROJ
Glavna sklopka, 3-pola, učvršćenje s 4 vijka, 80A	
Izvedba/tip Glavna sklopka, Nazivna struja 80A, Polovi 3, IP stupanj zaštite IP65 (front), IP10 (output terminals), IP20 (supply terminals with terminal cover and Cable cross-section bigger than 6mm²)	INSE1380
Dodatni pribor	
Pomoćni kontakt 1NO/1NC za INSE	
Nije dopušteno koristiti za INSR, INSP i INSA, Izvedba/tip Pribor, IP stupanj zaštite IP20 (terminals)	INSHK002
N-kontakt za 3-polne INSE sklopke, 80A	
N-kontakt koji se može naknadno pričvrstiti kako bi se 3-polni sklopnik preradio u 4-polni. Smije se koristiti samo kod INSE sklopnika s nazivnom strujom 80 A. Nije dopušteno koristiti za INSR, INSP i INSA!	INSNK022