


Tehnički list za artikl: INSR2380--

Glavna sklopka za isklop u nuždi, 3-pola, DIN nosač, 80A

Izvedba/tip Emergency sklopka, Nazivna struja 80A, Polovi 3, IP stupanj zaštite IP40 (front), IP10 (terminals)

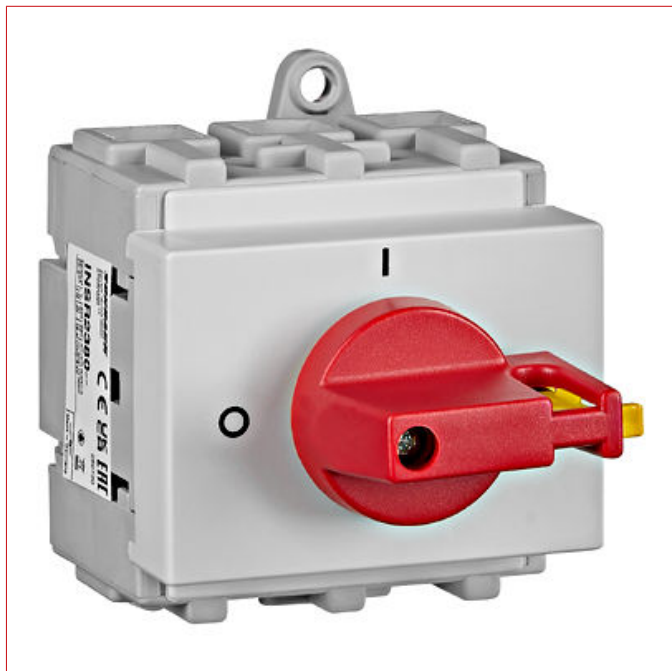


Tehnički podaci

Izvedba/tip	Emergency sklopka
Nazivna struja (A)	80
Polovi	3
Način montaže	DIN nosač
Norma	IEC 60947, EN 60947, VDE 0660
Nazivni napon izolacije [Ui] (V)	690
Nazivni udarni podnosivi napon [Uimp] (V)	6000
Nazivna kratkotrajno podnosiva struja Icw	1000
Nazivna struja kratkog spoja	10kA @ 440V / 6kA @ 690V
Kratkospojna zaštita, maks. rastalni osigurač	80
Frekvencija (Hz)	50/60
Operating Current	AC-21A - 690V - 80A AC-23A - 690V - 22A AC-23A - 400V - 43A AC-3 - 400V - 43A AC-3 - 690V - 22A


Tehnički podaci - nastavak

Switching Capacity	AC-23A - 400V - 30kW AC-23A - 690V - 22kW AC-3 - 690V - 18.5kW AC-3 - 400V - 22kW
According to UL 508 / CSA	
Tip priključka	UL/CSA - AWG 14-6
Radni napon AC (V)	600
Thermal rated continuous current (A)	80
Active Power	3x240VAC - 15Hp 3x600VAC - 50Hp 3x480VAC - 40Hp 1x120VAC - 10Hp
Priključak	
Konvencionalna termička struja Ith (A)	80
MOment pritezanja (Nm)	2,50
Presjek priključnih vodiča, višezilni kabel (mm²)	2,5-35
Presjek priključnih vodiča, Jednožični (mm²)	2,5-35
Presjek priključnih vodiča, finožični kabel s tuljkom (mm²)	2,5-16
Retrofit contacts	
Pomoćni kontakti	Maximum 2x INSHK001-- permitted. 1x INSHK001-- can be snapped on to the left side of the main contact and 1x INSHK001-- to the right side of the main contact. Maximum configuration 2x NC contact / 2x NO contact. The switching behavior is the same regardless of whether the auxiliary contact is snapped on to the left or right side of the main contact.
Neutral conductor contacts	ATTENTION! If this 3-pole switch is converted to a 4-pole switch using neutral conductor contact INSNK012--, no additional auxiliary contact can be snapped onto the N contact. On the other side, auxiliary contact INSHK001-- can be used as normal. For further details, see Auxiliary contact and N contact overview
Radna temperatura	-25°C to +55°C
Mehanički životni vijek	100000 switching cycles
Gubitak snage po polu (W)	5,50
Zaštita od dodira	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP stupanj zaštite	IP40 (front), IP10 (terminals)
Lockable	With 2 locks, each with a shackle lock diameter of 4-6 mm
Neto duljina (mm)	88,00
Neto širina (mm)	63,00
Neto visina (mm)	45,00
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	55

Schaltbild INSR2380--



Maßbild INSR2380--

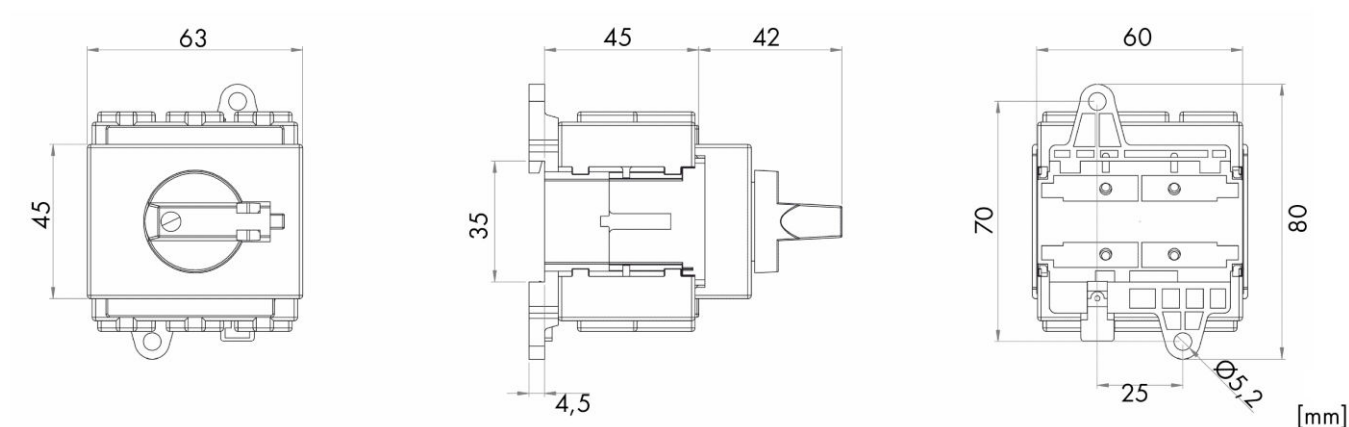

Montageanleitung INSR Hutschienenmontage Schalter



Montageanleitung INSHK Hilfskontakte bei Verwendung von INSNK Neutralleiterkontakte



Tabela artikla

OPIS	KAT. BROJ
Glavna sklopka za isklup u nuždi, 3-pola, DIN nosač, 80A	INSR2380
Izvedba/tip Emergency sklopka, Nazivna struja 80A, Polovi 3, IP stupanj zaštite IP40 (front), IP10 (terminals)	
Dodatni pribor	
Pomoćni kontakt 1NO/1NC za INSR, INSP i INSA	INSHK001
Nije dopušteno koristiti za INSE, Izvedba/tip Pribor, IP stupanj zaštite IP20 (terminals)	
N-kontakt za 3-polne INSR, INSP i INSA sklopke, 80A	
N-kontakt koji se može naknadno pričvrstiti kako bi se 3-polni sklopnik preradio u 4-polni. Smije se koristiti samo kod INSR, INSP ili INSNK012	
INSA sklopnika s nazivnom strujom 80 A. Nije dopušteno koristiti za INSE!	