

Tehnički list za artikl: DSS4280103

Serverski ormar 800x1970x1000mm (ŠxVxD), 19", 42U, do 1500kg

stražnja dvostruka vrata perforirana, bez podnožja, IP30



SCHRACK info

- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42U
- Widths: 800mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1000mm
- Colour: light grey RAL 7035, frame blue RAL 5005
- Maximum static load: 1.500 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333) optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm
- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.

- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
 - W600 – 30 mm
 - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
 - W600 – 30 mm
 - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
 - W600 x D800 – 730 mm
 - W600 x D1000 – 930 mm
 - W800 x D800 – 670 mm
 - W800 x D1000 – 870 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
 - D800 – 775 mm
 - D1000 – 975 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
 - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
 - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
 - D800 - Opening: 10 U, Covering: 1 x 10 U
 - D1000 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
 - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
 - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
 - 16 x Cage nuts, bolts and washers M6
 - 4 x Levelling feet
 - 1 x Brush
 - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.


Tehnički podaci

Neto širina (mm)	800,00
Neto visina (mm)	1.970,00
Neto dubina (mm)	1.000,00

Tehnički podaci - nastavak

Neto masa (kg)	148,00
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Visina	42U-1970mm
Boja	RAL 7035 / RAL 5005 (svijetlo siva / plava)

Mjerne skice: Serverski ormar 800x1970x1000mm (ŠxVxD), 19", 42U, do 1500kg

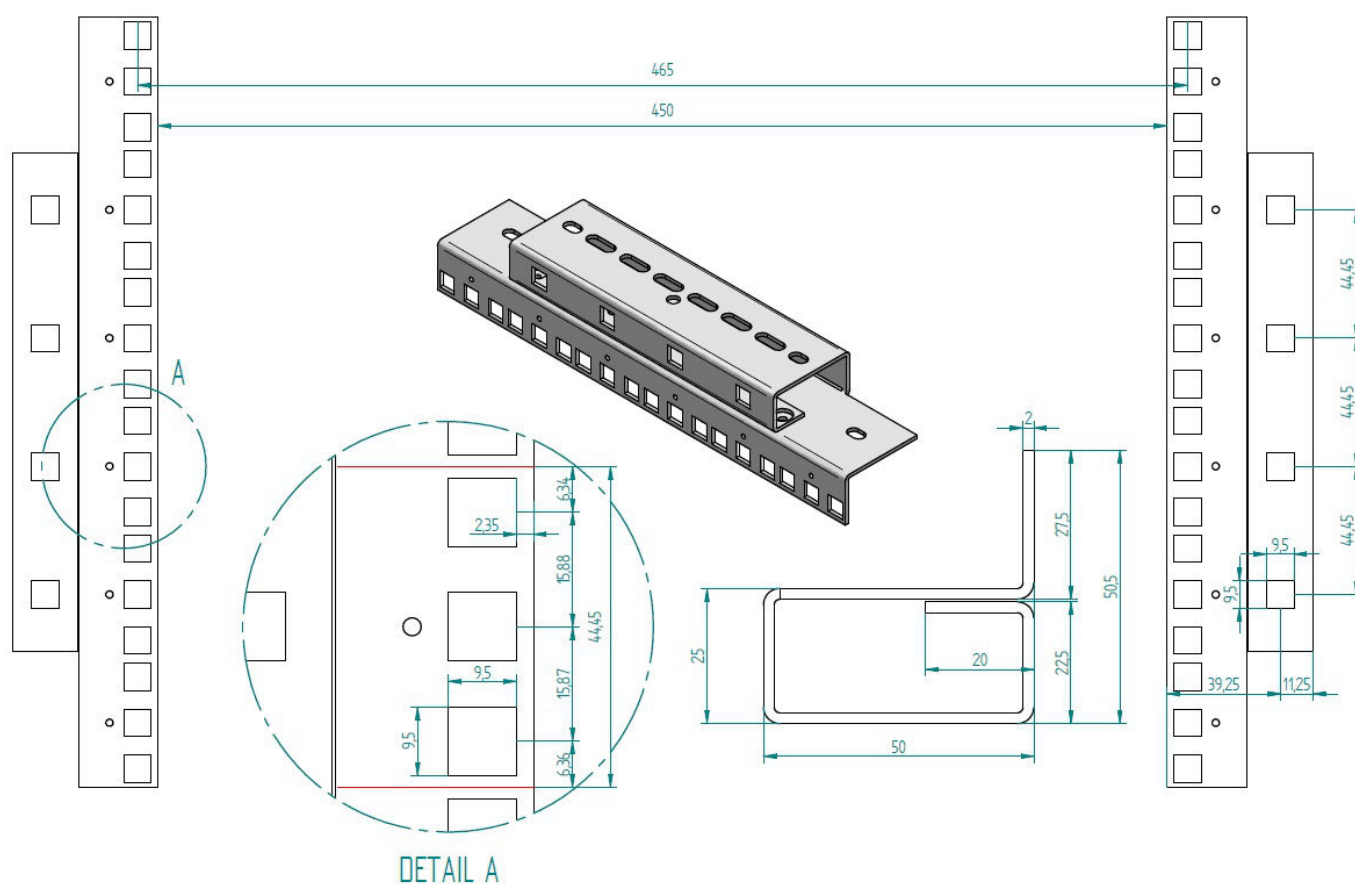

OPIS	KAT. BROJ
Serverski ormar 800x1970x1000mm (ŠxVxD), 19", 42U, do 1500kg stražnja dvostruka vrata perforirana, bez podnožja, IP30	DSS4280103
Dodatni pribor	

Tabela artikla

OPIS	KAT. BROJ
Dodatni pribor	
Polucilindar brava, EK 333 s 1 ključem	DV900333
Krovni panel s četkom za uvod kab. za DS ormare, 2U, RAL7035	DBK24800
Krovn vent. jedinica, 2xventilator 35W i termostat, 19", 4U	DLT44802-A
Podnožje, bočne stranice, par, za ormare DSS, D=1000mm Max.Load = 1800kg, RAL7035 Lightgrey	DSSOT1210
Podnožje, pred./zad. pokrov perf.+filter, Š=800 za DS,-Z,-SS	DSOF1283
19" vodilica kabela s 5 velikih metalnih prstena 80x40, 1U	DBC14805
19" vodilica kabela s 5 velikih prstena 70x40, 1U, RAL7035	DBK14805
19" fiksna polica do maks. 80kg, d=450mm, 1U, RAL7035	DFS14845-C
19" napojna letva s 9xšuko, alu 1U, kabel 3m, RAL7035	IU070114-3
19" napojna letva sa 7xshuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" Napojna letva, 9xšuko+prekidač 1U, kabel 2m, crna, alu ALU profil	Q7070114-A
19" Napojna letva, 7xšuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A
IT METER LINE nap. letva, pasivna, ul:CEE 16A crv., izl: 12xC13	HSMPP312
IT METER LINE nap. letva s mj. snage, 36xC13+6xC19, eth., 2xsen	HSMPP336
Okomiti nosač nap. letve za 600 i 800mm širine DSS ormara 1U, 1 pak = 2 kom., za napojne letve s 19" montažom, montaža na kućište ormara, uklj. montažni set	DSSPDU010
Okomiti nosač nap. letve za 600 i 800mm širine DSS ormara 2U, 1 pak = 2 kom., za napojne letve s 19" montažom. Montaža na kućište ormara, uklj. montažni set	DSSPDU021
Okomiti nosač nap. letve za 600 i 800mm širine DSS ormara 2U, 1 pak = 2 kom., za napojne letve s montažom na gumb. Montaža na kućište ormara, uklj. montažni set	DSSPDU022
19" set-vijci M6, kavezne matice i podložne pločice(50 kom.)	DSSRA050
19" montažna ploča, 14U, čelična, perforirana	DMP1914
LED rasvjeta za ormare, magnet, 230VAC, s kontaktom za vrata automatski u radu čim se otvore vrata, vanjsko napajanje	DTLIGHT01
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje Metalno kućište, 19"	QLGSW2457
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabela okrenut prema dolje	HSER0240GS