



Tehnički list za artikl: DW156040--

Zidni komunikacijski ormar DW Monoblock 600x770x395, 19", 15U



SCHRACK info

TEHNIČKI PODACI

- Čelični lim
- Raspoložive visine: 4, 6, 9, 12, 15 and 18U
- Širina: 600mm, Dubina: 395mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	770,00
Neto dubina (mm)	395,00
Neto masa (kg)	22,40
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Visina	15U-770mm


Tehnički podaci - nastavak

Proizvod	Data-Enclosures Wallmounting Monobloc IP20
Boja	RAL 7035 (svijetlo siva)
Krovni ventilator, opcija	Ne
Osnovna oznaka	Kućište

Podatkovna tablica: Zidni komunikacijski ormar DW Monoblock 600x770x395, 19", 15U

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW046040--	280	175	516	600	395	234	420	12,0	11,7	60
DW066040--	370	265	516	600	395	324	420	13,9	13,6	60
DW096040--	500	395	516	600	395	454	420	16,5	16,1	80
DW126040--	635	530	516	600	395	589	420	19,5	19,1	80
DW156040--	770	665	516	600	395	724	420	22,2	21,8	100
DW186040--	900	795	516	600	395	854	420	25,1	24,7	100

**Mjerne skice: Zidni komunikacijski ormar DW Monoblock 600x770x395,
19", 15U**

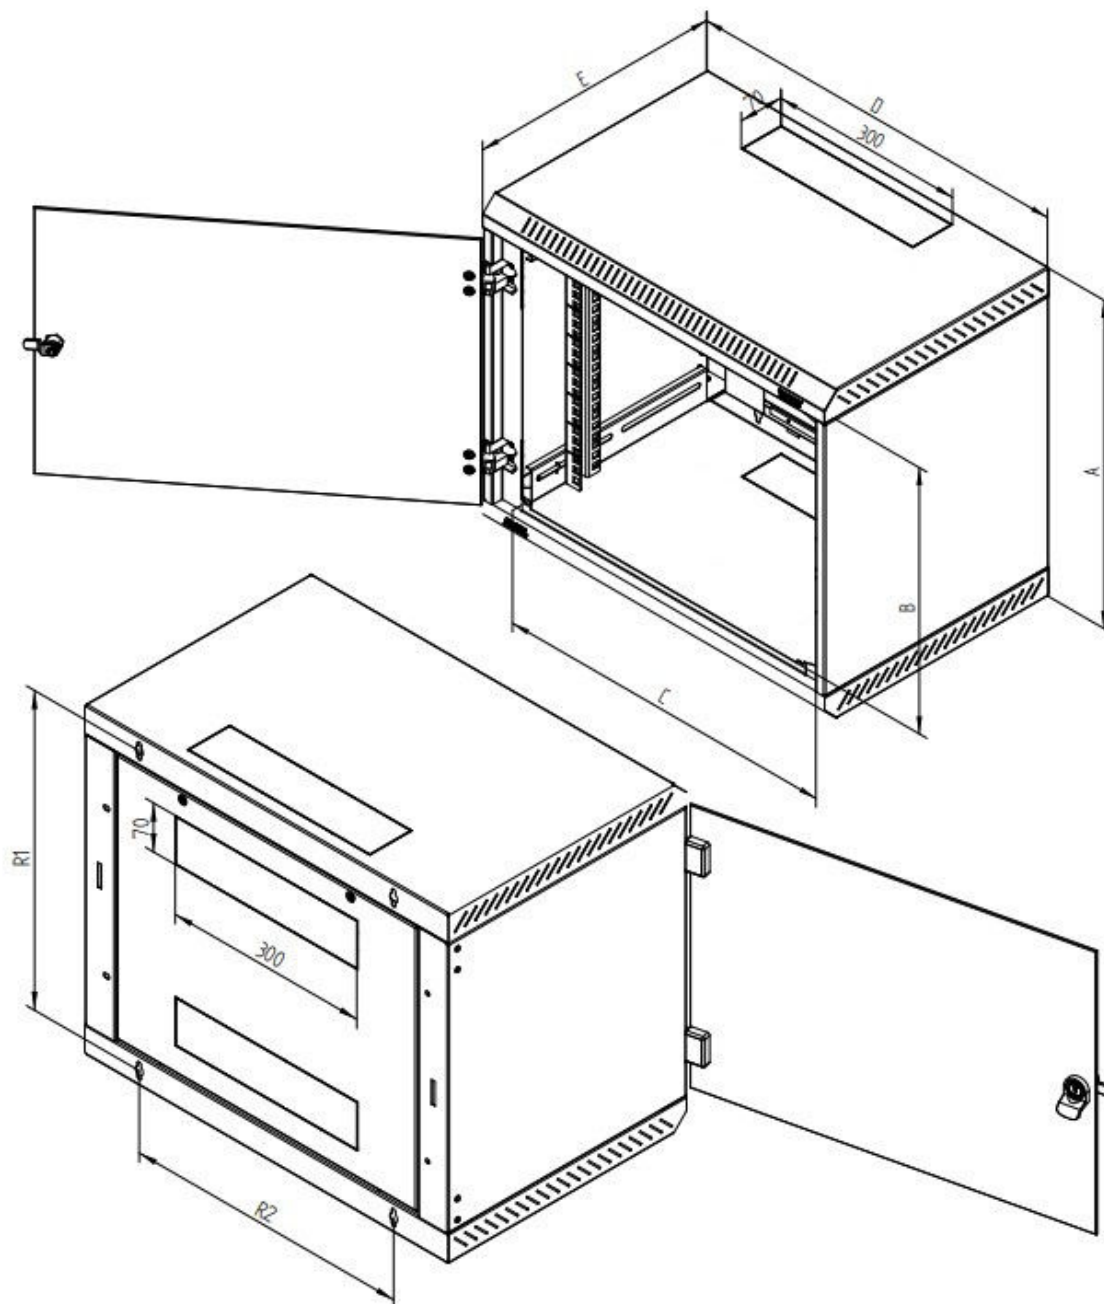

Schnittansicht der vertikalen 19"-Profilschienen

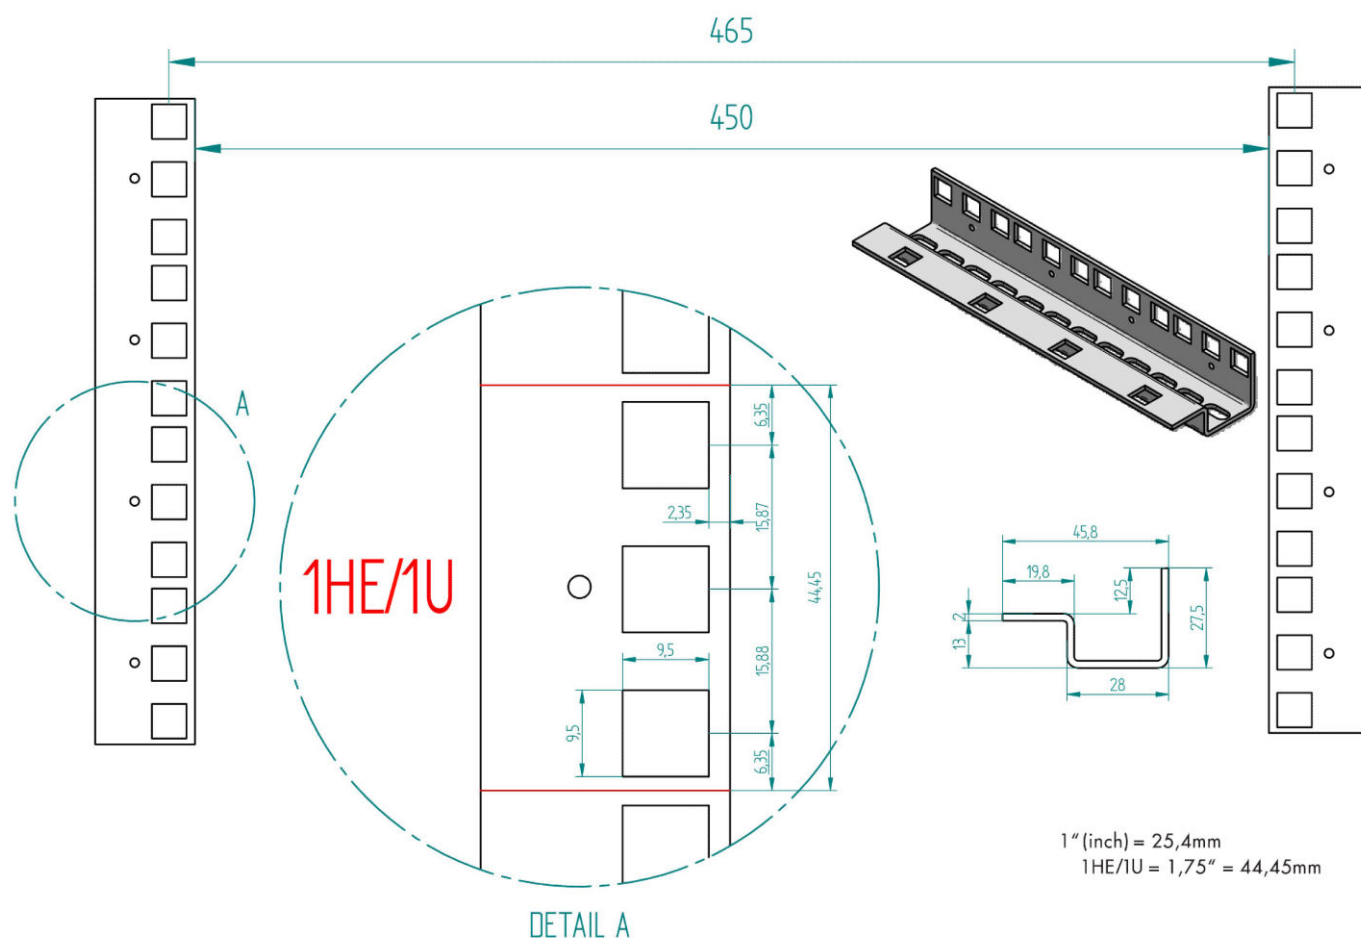


Tabela artikla

OPIS	KAT. BROJ
Zidni komunikacijski ormar DW Monoblock 600x770x395, 19", 15U	DW156040
Dodatni pribor	
19" fiksna polica do maks. 15kg, d=250mm, 1U, RAL7035	DFS14825-C
19" set-vijci M6, kavezne matice i podložne pločice(50 kom.)	DSSRA050
LED rasvjeta za ormare, magnet, 230VAC, s kontaktom za vrata automatski u radu čim se otvore vrata, vanjsko napajanje	DTLIGHT01
19" napojna letva sa 9xšuko, alu 1U, kabel 2m, RAL7035	IU070114
19" napojna letva sa 7xšuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" Napojna letva, 9xšuko+prekidač 1U, kabel 2m, crna, alu ALU profil	Q7070114-A

Tabela artikla

OPIS	KAT. BROJ
Dodatni pribor	
19" Napojna letva, 7xšuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A
19" profil. nosači, visine 15U za DS-, DSZ-, DSI i DW-ormare	DSPROF15
Metalna vrata puna s bravicom, za DW ormare 15U, Š=600	DWRT1560
Perforirana vrata s bravicom, za DW ormare 15U, Š=600	DWRT1561
Staklena vrata s bravicom, za DW ormare 15U, Š=600	DWRT1563
Puna metalna vrata sa zakret. ručkom, za DW ormare 15U Š=600 Vorbereitung	DWRT1566
Staklena vrata sa zakret. ručkom, za DW ormare 15U, Š=600 Vorbereitung	DWRT1567
19" set nosača za police za zidne komunikacijske ormare DW	DFSZDW01
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje Metalno kućište, 19"	QLGSW2457
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabela okrenut prema dolje	HSER0240GS