


Tehnički list za artikl: DW18606D--

Zidni komunikacijski ormar DW Dualbloc, 600x900x615, 19", 18U



SCHRACK info

TEHNIČKI PODACI

- Čelični lim
- Raspoložive visine: 4, 6, 9, 12, 15, 18 and 21 U
- Širina: 600mm, Dubina: 515/615mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	900,00
Neto dubina (mm)	615,00
Neto masa (kg)	35,40
Min. temperatura okoline (°C)	0


Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	40
Visina	18U-900mm
Proizvod	Data-Enclosures Wallmounting Dualbloc IP20
Boja	RAL 7035 (svijetlo siva)
Krovni ventilator, opcija	Ne
Osnovna oznaka	Kućište

Podatkovna tablica: Zidni komunikacijski ormar DW Dualbloc, 600x900x615, 19", 18U

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW18606D--	900	795	516	600	615	854	420	33,6	33,2	30
DW21606D--	1035	930	516	600	615	989	420	39,2	38,73	35

**Mjerne skice: Zidni komunikacijski ormar DW Dualbloc, 600x900x615,
19", 18U**

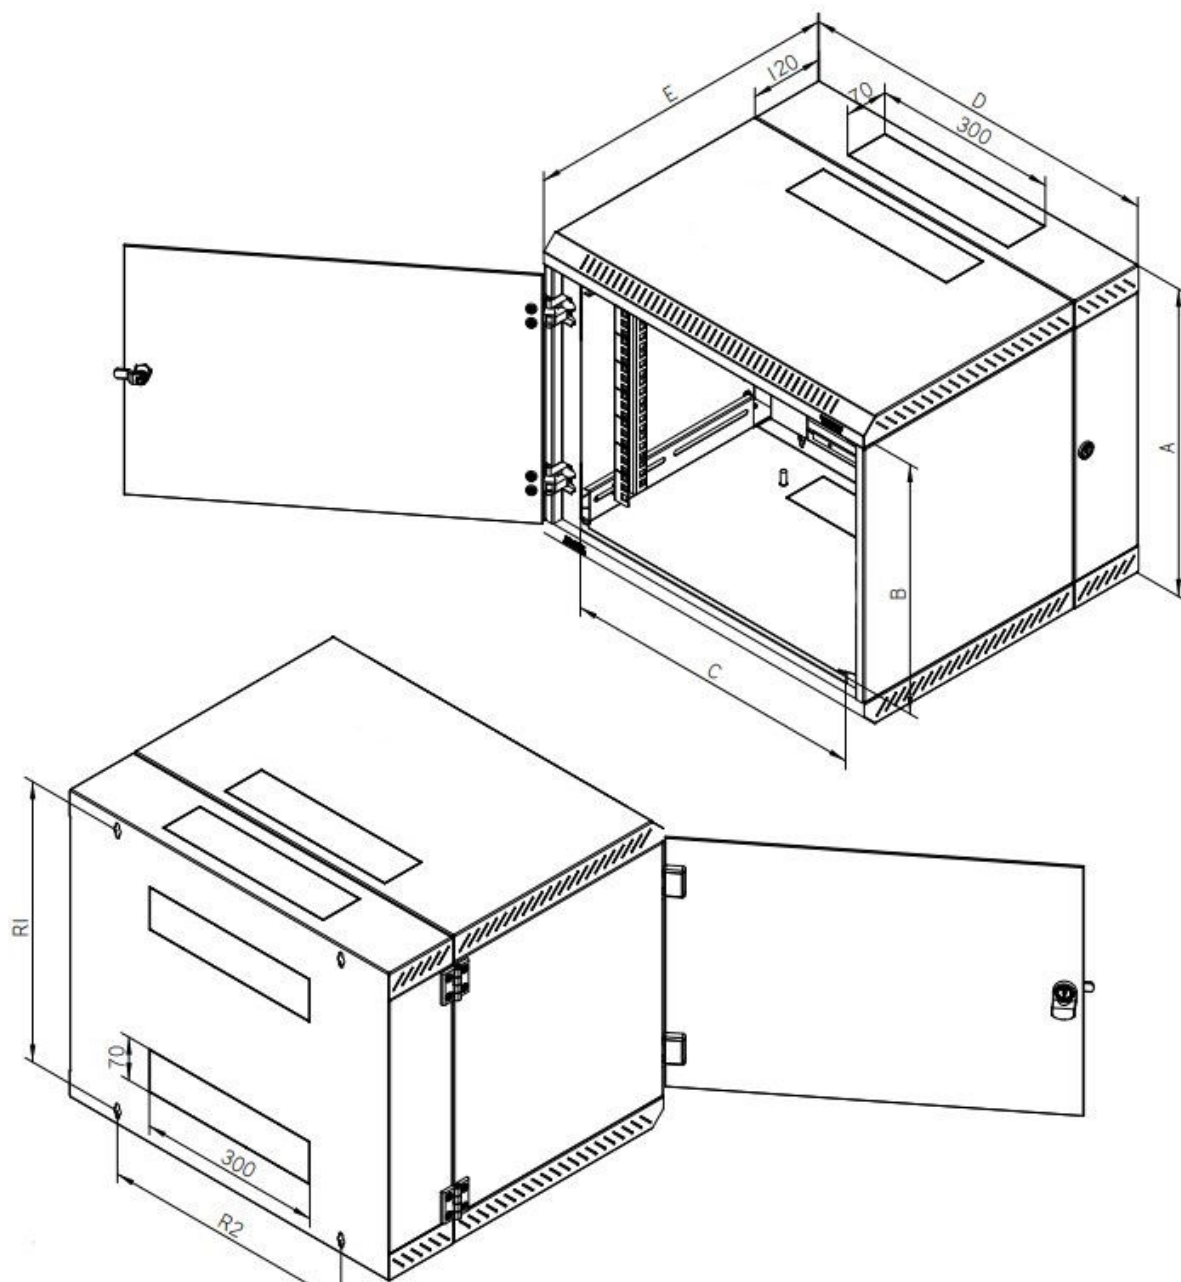

Schnittansicht der vertikalen 19"-Profilschienen

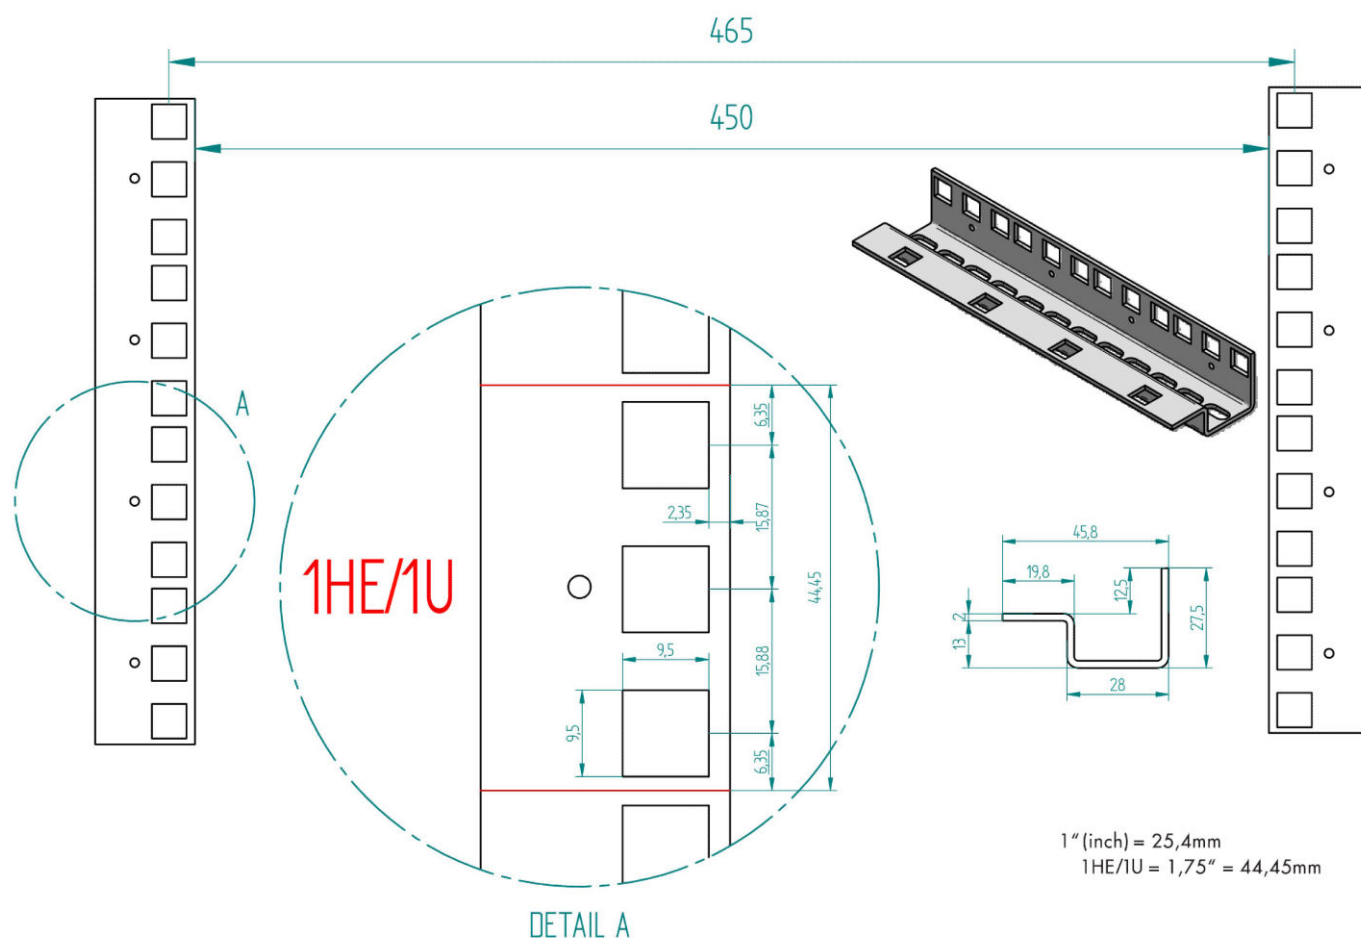


Tabela artikla

OPIS	KAT. BROJ
Zidni komunikacijski ormar DW Dualbloc, 600x900x615, 19", 18U	DW18606D
Dodatni pribor	
19" fiksna polica do maks. 50kg, d=350mm, 1U, RAL7035	DFS14835-C
19" set-vijci M6, kavezne matice i podložne pločice(50 kom.)	DSSRA050
LED rasvjeta za ormare, magnet, 230VAC, s kontaktom za vrata automatski u radu čim se otvore vrata, vanjsko napajanje	DTLIGHT01
19" napojna letva sa 9xšuko, alu 1U, kabel 2m, RAL7035	IU070114
19" napojna letva sa 7xšuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" Napojna letva, 9xšuko+prekidač 1U, kabel 2m, crna, alu ALU profil	Q7070114-A

Tabela artikla

OPIS	KAT. BROJ
Dodatni pribor	
19" Napojna letva, 7xšuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A
Metalna vrata puna s bravicom, za DW ormare 18U, Š=600	DWRT1860
Perforirana vrata s bravicom, za DW ormare 18U, Š=600	DWRT1861
Staklena vrata s bravicom, za DW ormare 18U, Š=600	DWRT1863
Puna metalna vrata sa zakret. ručkom, za DW ormare 18U Š=600 Vorbereitung	DWRT1866
Staklena vrata sa zakret. ručkom, za DW ormare 18U, Š=600 Vorbereitung	DWRT1867
19" set nosača za police za zidne komunikacijske ormare DW	DFSZDW01
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje Metalno kućište, 19"	QLGSW2457
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabela okrenut prema dolje	HSER0240GS