


Tehnički list za artikl: EV103002--

Umetak dimera, 300 W/VA, RLC, 2-žični

Cover EV102013--

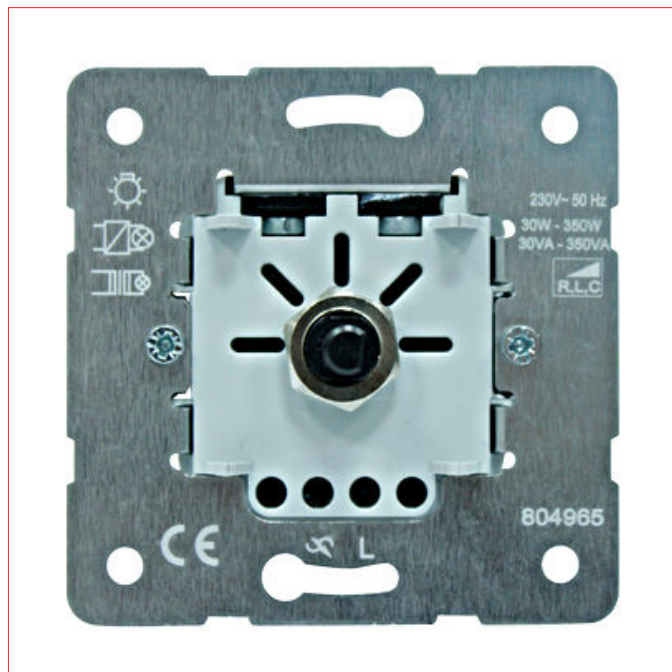

Schrack-Info

Universal rotary dimmer with on/off button for resistive, inductive or capacitive loads. The dimmer is equipped with automatic load detection, i.e. the dimmer adjusts the operating mode when the load is first connected. The memory function turns on the lamp (by pressing the knob) with the brightness it had before the last switch-off. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Dizajn	CLASSIC
Tip proizvoda	Dimer
Tip dimera	Univerzalni dimer
Vrsta otpora	Induktivni Omski Kapacitivni
Dimabilna rasvjetna tijela	Niskonaponska halogena žarulja sa elektronskim napajanjem Žarulja Visokonaponska halogena svjetiljka Niskonaponska halogena žarulja sa konvencionalnim trafom

Tehnički podaci - nastavak

Raspon snage	20-300 W/VA
Radni napon AC (V)	230
Način ugradnje	Screws and claws
Način pričvršćenja	Podžbukni
Radna temperatura	+5°C bis +45°C
Zaštita	Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	prema EN 60669-1
Dopušteni kabeli	Kruti Fleksibilni sa tuljcima Fleksibilni
Dopušteni presjek (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Okoliš	bezhalogeno
Trajnost	ROHS
Ispitni znak	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35


Podatkovna tablica: Umetak dimera, 300 W/VA, RLC, 2-žični

							
Min.	30 W	30 W	30 VA	30 VA	-	-	-
Maks.	350 W	350 W	350 VA	350 VA	-	-	-


- 1 ... žarulje sa žarnom niti
2 ... halogene
3 ... konvencionalni transformator
4 ... elektronski transformator

- 5 ... dimabilne štedne žarulje CFL
6 ... dimabilne 230V LED
7 ... dimabilne 12V LED

Anschlussplan

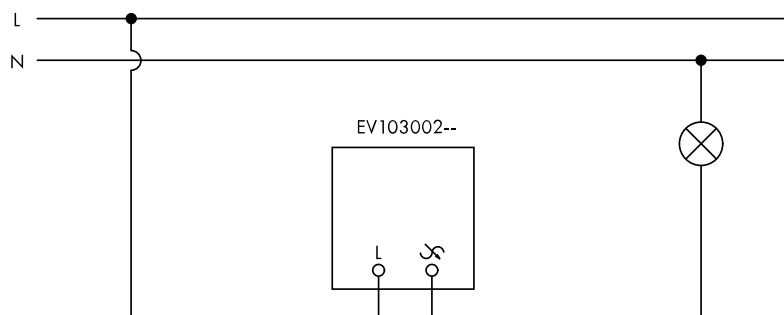

Abmessungen (mm)

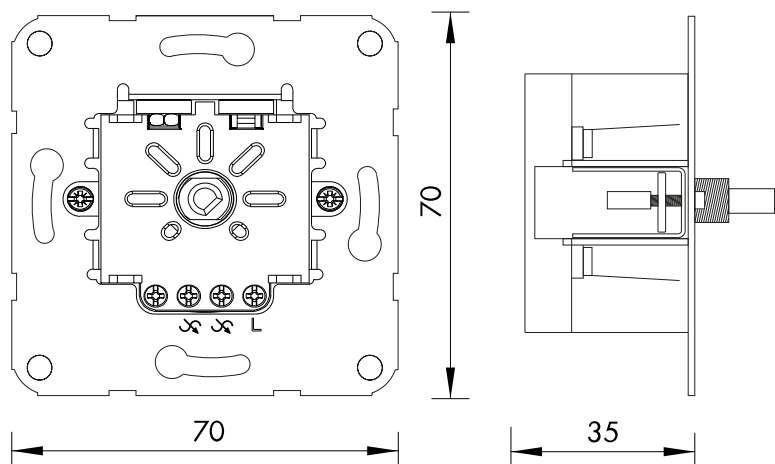

OPIS	KAT. BROJ
Umetak dimera, 300 W/VA, RLC, 2-žični	EV103002
Cover EV102013--	