

Tehnički list za artikl: EV103003--

Umetak dimera, 400 W/VA, RL, 2-žični

Cover EV102013--



Schrack-Info

Phase angle rotary dimmer with on/off button for resistive or inductive loads. The built-in potentiometer can be used to set a basic brightness, i.e. a constant brightness value which is the same each time the unit is switched on. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Dizajn	CLASSIC
Tip proizvoda	Dimer
Tip dimera	Trailing edge dimer
Vrsta otpora	Induktivni Omski
Dimabilna rasvjetna tijela	Žarulja Visokonaponska halogena svjetiljka Niskonaponska halogena žarulja sa konvencionalnim trafom
Raspon snage	60-400 W/VA
Radni napon AC (V)	230

Tehnički podaci - nastavak


Način ugradnje	Screws and claws
Način pričvršćenja	Podžbukni
Radna temperatura	0°C bis +35°C
Zaštita	Short-circuit protection Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	prema EN 60669-1
Dopušteni kabe	Kruti Fleksibilni sa tuljcima Fleksibilni
Dopušteni presjek (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Okoliš	bezhalogeno
Trajnost	ROHS
Ispitni znak	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35

Dimmleistung

							
Min.	60 W	60 W	60 VA	-	-	-	-
Max.	400 W	400 W	400 VA	-	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

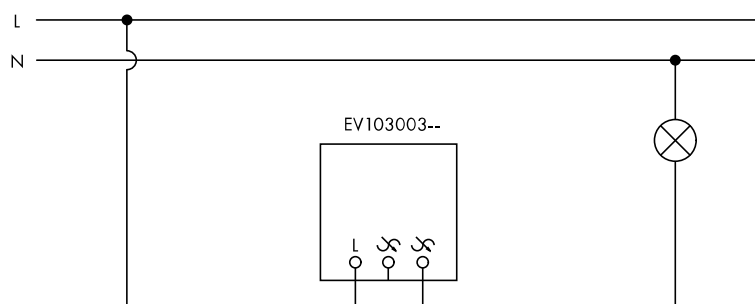

Abmessungen (mm)

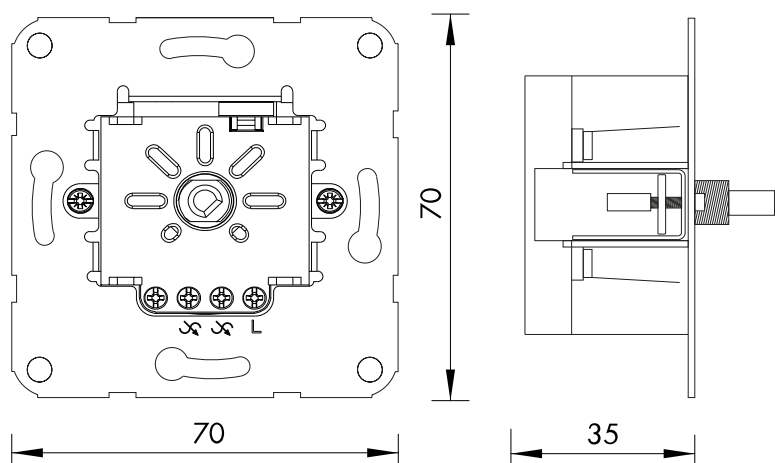


Tabela artikla

OPIS	KAT. BROJ
Umetak dimera, 400 W/VA, RL, 2-žični Cover EV102013--	EV103003
Dodatni pribor	
Pokrov/tipka dimera, bijela	EV102013
Pokrov/tipka dimera, antracit	EV112013
Pokrov/tipka dimera, srebrna	EV122013