


Tehnički list za artikl: H6GMY03K0Y

# Prespojni kabel RJ45 oklopljen 10GB, LSOH, žuti, 3.0m

4PPoE 100W, CLASSIC



## Schrack-Info

Patchcords for generic, structured-network cabling systems RJ45/RJ45, 1:1 S/FTP double shielding. For transmission speeds up to 10 Gigabit Ethernet. Bandwidth up to 500 MHz. The cable offers maximum data security Pair in metal foil overall braid, as well as 360° shielded RJ45 connectors. This patchcord is suitable for use in offices and datacenters.

### Standards:

- IEEE 802.3; 10BaseT; 100BaseT; 1000BaseT; 10GBaseT; IEEE 802.5 16MB; ISDN; ATM; Telefon
- Pin-Assignment: EIA/TIA 568B 1:1
- Cat. 6<sub>A</sub>, ISO/IEC 11 801 Ed.2.2 (2011-07) IEC 61935-2 Ed.3.0 (2010-07), EN 50173-1 and IEC 61156-6


## Tehnički podaci

|                  |             |
|------------------|-------------|
| Neto širina (mm) | 240,00      |
| Neto visina (mm) | 200,00      |
| Brzina prijenosa | 10Gbit      |
| Kategorija       | Cat.6       |
| Sastav kabela    | 4x2xAWG26/7 |
| Kabelski oklop   | S/FTP       |

## Tehnički podaci - nastavak

|                                          |                                  |
|------------------------------------------|----------------------------------|
| Materijal vodiča                         | Licnasta žica AWG 26/7 (0,457mm) |
| Konekcija                                | 1:1                              |
| Broj parica                              | 4                                |
| Oklop                                    | Oklopljen                        |
| Vanjski omotač kabela                    | LSOH                             |
| LED funkcija                             | bez LED                          |
| Boja                                     | žuta                             |
| Temperaturno područje - Pogon (°C)       | -25 do +60                       |
| Temperaturno područje - Instalacija (°C) | +0 do +50                        |
| Otpor (Ohm)                              | 100 ± 5                          |
| Izolacijski otpor (MΩ*km)                | > 2000MΩ/km                      |
| Kašnjenje uklopa (ns/m)                  | > 10MHz: 4,5                     |
| RoHS                                     | Konformno                        |
| Impedancija petlje (Ω/km)                | 300                              |
| 4PPoE                                    | Da                               |
| Duljina prespojnog kabela (m)            | 3,0                              |

## Mjerne skice: Prespojni kabel RJ45 oklopljen 10GB, LSOH, žuti, 3.0m

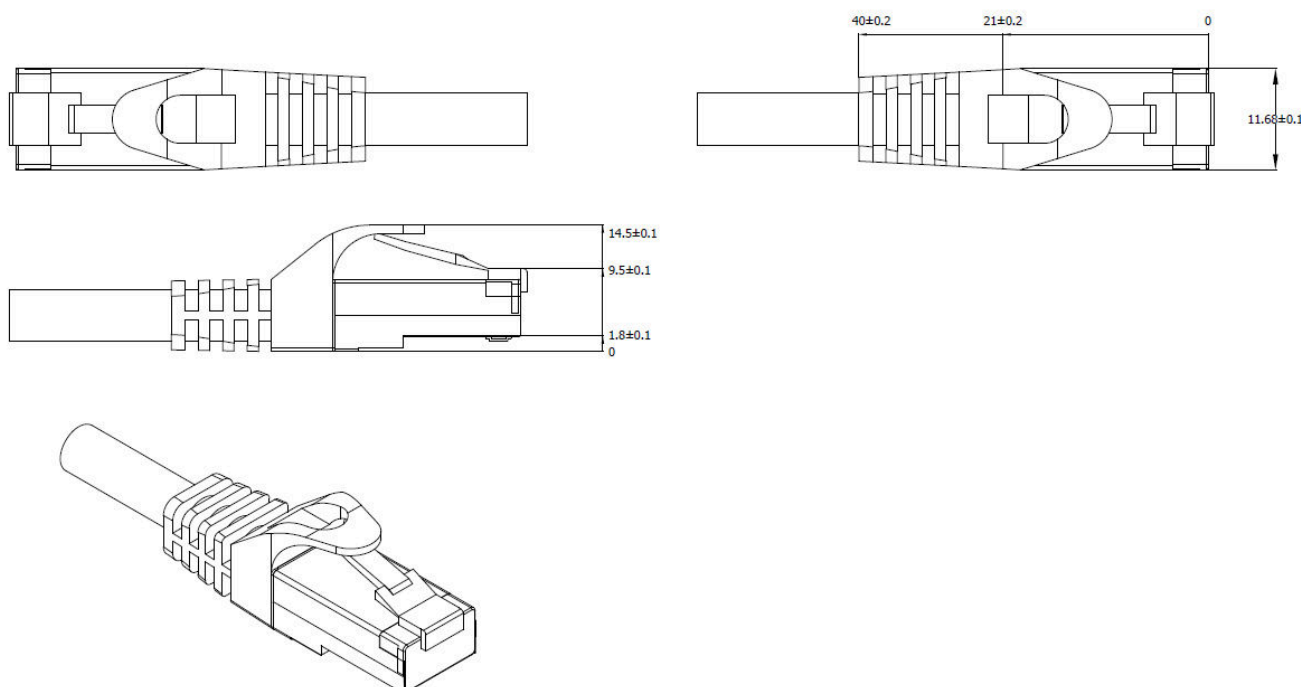

## Tabela artikla

| OPIS                                                                            | NVP (%) | MASA BAKRA (kg/km) | KAT. BROJ  |
|---------------------------------------------------------------------------------|---------|--------------------|------------|
| Prespojni kabel RJ45 oklopljen 10GB, LS0H, žuti, 3.0m<br>4PPoE 100W, CLASSIC    |         |                    | H6GMY03K0Y |
| <b>Dodatni pribor</b>                                                           |         |                    |            |
| S-JACK modul RJ45 oklopljen, Cat.6a 10GB, 4PPoE 100W SFB<br>24 kom. u kutiji    |         |                    | HSEMRJ6GS2 |
| S-JACK modul RJ45 oklop., Cat.6a 10GB, 4PPoE 100W SFB<br>.                      |         |                    | HSEMRJ6GS1 |
| TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFB<br>(SFB)           |         |                    | HSEMRJ6GBA |
| TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFA<br>(SFA)           |         |                    | HSEMRJ6GWA |
| S/FTP kabel cat.7a, 4x2xAWG22/1, 1500MHz, LS0H-3, Dca, plavi<br>za rezanje      | 79      | 34                 | HSEKP422HP |
| S/FTP kabel cat.7, 4x2xAWG23/1; 1.000MHz, LS0H; Dca, 30%, plavi<br>bubanj 1000m | 77      | 25                 | HSKP423PP1 |
| S/FTP kabel cat.7, 4x2xAWG23/1; 1.000MHz, LS0H; Dca, 30%, plavi<br>bubanj 500m  | 77      | 25                 | HSKP423PP5 |
| F/FTP inst. kabel cat.6a, 4x2xAWG23/1, 500MHz, LS0H-3, Dca, plavi<br>za rezanje | 79      | 20                 | HSEKP423HA |