


Tehnički list za artikl: HDCR100249

IS-1 okomita vodilica kabla 41 U RAL7035 svjetlosiva

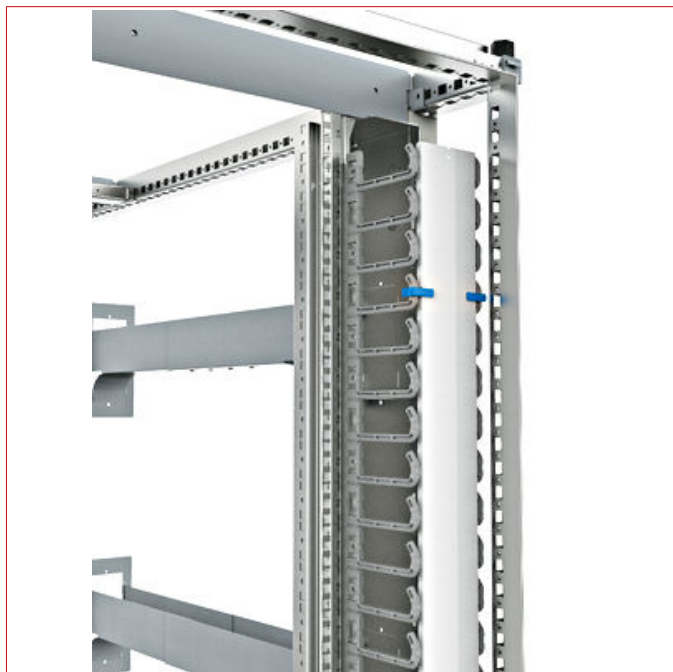

SCHRACK-Info

IS-1 cable manager, vert. 41 U R7035 packed

Cabinet height: 2,000 mm

Dimensions of extension bracket: 90 x 112 mm (W x D)

Inside depth of the cable finger: 78 mm

Material/finish Channel: Sheet steel, powder-coated

Material of finger/clips: PC+ABS FR40

Fire behaviour: halogen-free; UL 94 V-0

Channel colour: RAL 7035 Light grey

Finger colour: RAL 9005 Jet black

Vertical cable manager for structured cable routing

in IS-1 cabinets. Large channel for storing excess lengths. Rounded 1 U cable finger for safe guidance of fibre optic cables. Four cable entries each at the side and rear (knockout). Detachable, divided cap for closing the manager.

Note: Only for racks B700 (asymmetrical) and B800.

Comprising:

1 Vertical cable manager

17 Cable finger, 5x

2 Cap

Fitting material

Delivery condition: packed

Tehnički podaci

Neto širina (mm)	90,00
Neto visina (mm)	2.200,00
Neto dubina (mm)	112,00
Neto masa (kg)	9,50
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	60

OPIS	KAT. BROJ
IS-1 okomita vodilica kabela 41U RAL7035 svjetlosiva	HDCR100249