


Tehnički list za artikl: HLP24CC00F

Optički prespojni kabel DX SC/UPC-SC/ UPC, 50/125µm OM4, LSOH

Ijubičasti, 0.5m

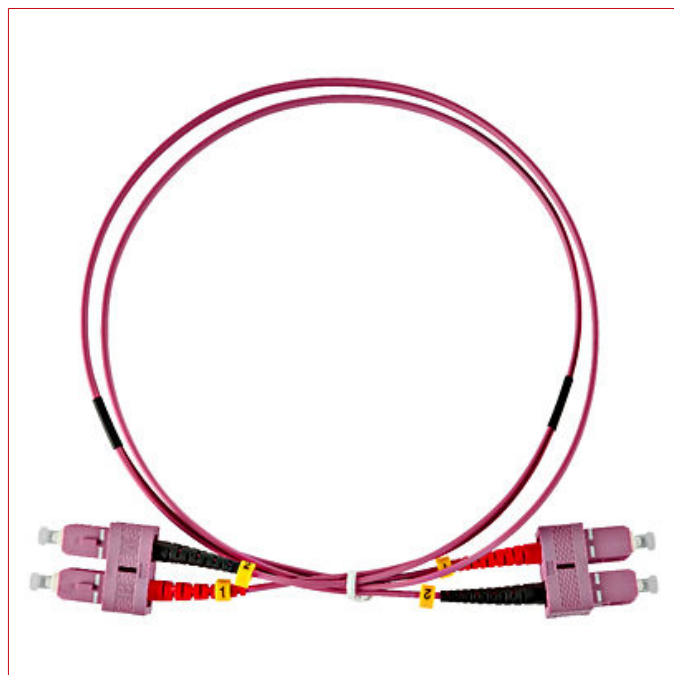

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- SC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Norma	IEC 61300-3-4 / IEC 61300-3-6
Utikač - Norma	IEC 61754
Kombinacija utičnica	SC/SC
Duljina prespojnog kabela (m)	0,50
Vlakno	multimodno 50/125µm OM4
Vanjski omotač kabela	LS0H
Boja	heather violet
Uklopno prigušenje tipično (dB)	≤0,25
Prigušenje povratnog toka tipično (dB)	≥30
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	150,00
Neto visina (mm)	200,00
Neto masa (kg)	0,04

Mjerne skice: Optički prespojni kabel DX SC/UPC-SC/UPC, 50/125µm OM4, LS0H

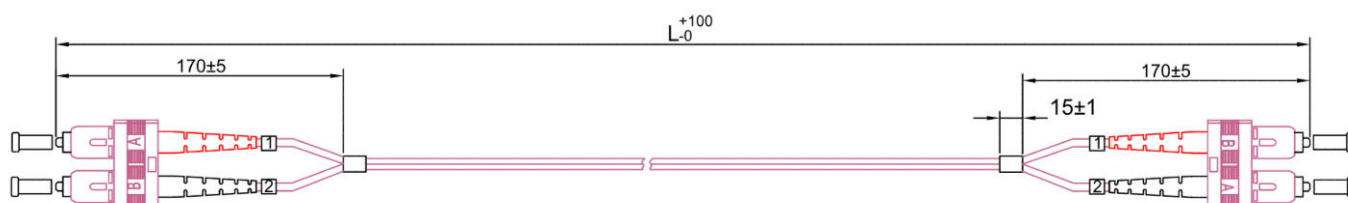

OPIS

KAT. BROJ

Optički prespojni kabel DX SC/UPC-SC/UPC,50/125µm OM4,LSOH
ljubičasti, 0.5m

HLP24CC00F