



Tehnički list za artikl: HLP29CD05F

# Optički prespojni kabel DX SC/UPC-SC/APC, 9/125µm OS2, 5,0m

LSOH, žuti

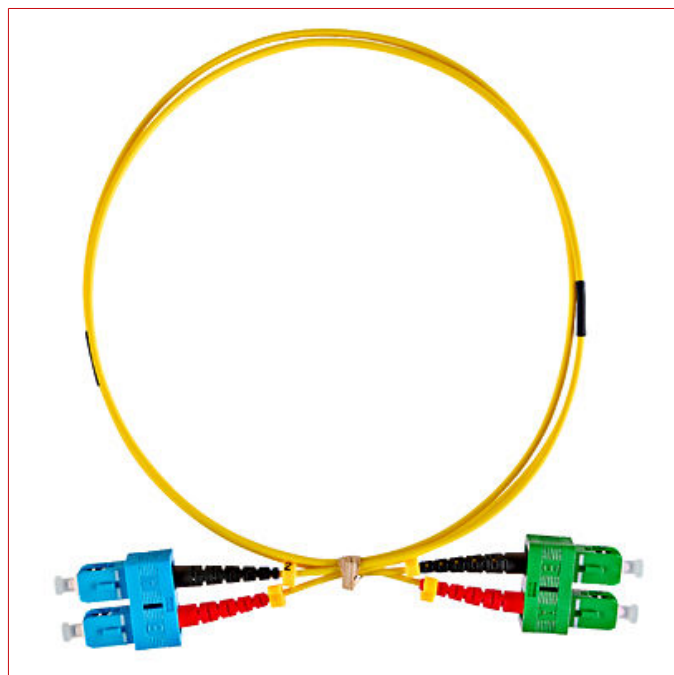

## SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

### FEATURES

- SC/UPC - SC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

### APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

## Tehnički podaci

|                                        |                               |
|----------------------------------------|-------------------------------|
| Norma                                  | IEC 61300-3-4 / IEC 61300-3-6 |
| Utikač - Norma                         | IEC 61754                     |
| Kombinacija utičnica                   | SC UPC/SC APC                 |
| Duljina prespojnog kabela (m)          | 5,0                           |
| Vlakno                                 | singlemodno 9/125µm OS1       |
| Vanjski omotač kabela                  | LSOH                          |
| Boja                                   | žuta                          |
| Promjer (mm)                           | 2 x 2,2                       |
| Uklopno prigušenje tipično (dB)        | ≤0,25                         |
| Prigušenje povratnog toka tipično (dB) | APC ≥60 / UPC ≥50             |
| Min. temperatura okoline (°C)          | -20                           |
| Maks. temperatura okoline (°C)         | 60                            |
| Neto širina (mm)                       | 200,00                        |
| Neto visina (mm)                       | 300,00                        |
| Neto masa (kg)                         | 0,27                          |

## Mjerne skice: Optički prespojni kabel DX SC/UPC-SC/APC, 9/125µm OS2, 5,0m

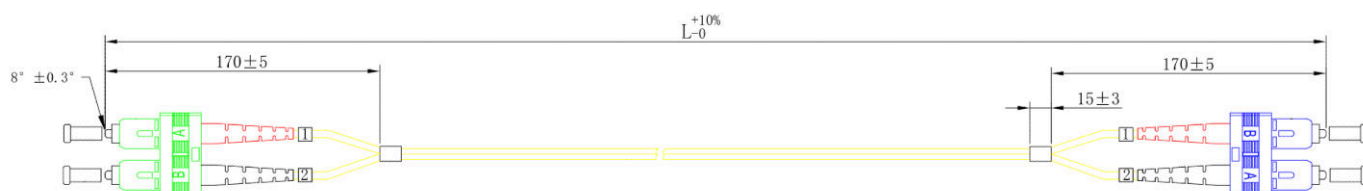

| OPIS                                                                      | KAT. BROJ  |
|---------------------------------------------------------------------------|------------|
| Optički prespojni kabel DX SC/UPC-SC/APC, 9/125µm OS2, 5,0m<br>LSOH, žuti | HLP29CD05F |