



Tehnički list za artikl: HLP29CM02F

Optički prespojni kabel DX SC/UPC-LC/APC, 9/125µm OS2, 2,0m

LSOH, žuti

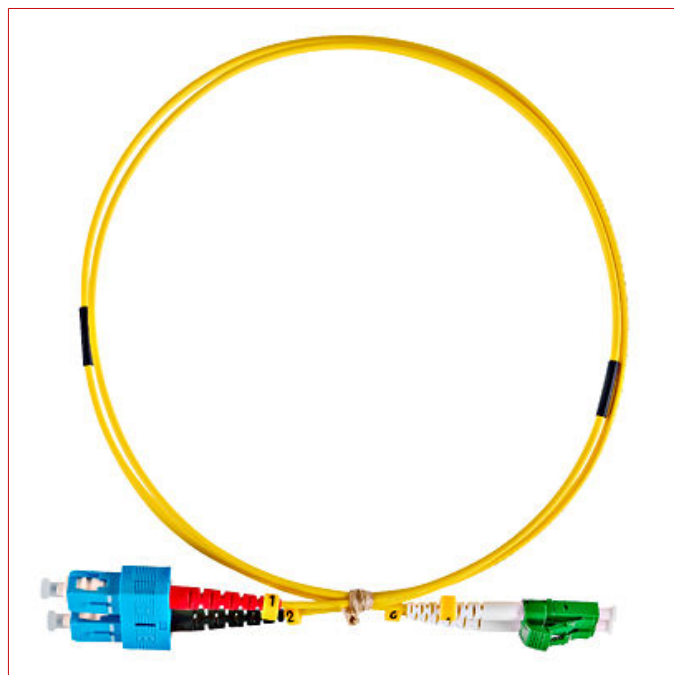

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- SC/UPC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

Tehnički podaci

Neto širina (mm)	170,00
Neto visina (mm)	200,00
Neto masa (kg)	0,11
Norma	IEC 61300-3-4 / IEC 61300-3-6
Utičać - Norma	IEC 61754
Kombinacija utičnica	SC UPC/LC APC
Duljina prespojnog kabela (m)	2,0
Vlakno	singlemodno 9/125µm OS1
Vanjski omotač kabela	LSOH
Boja	žuta
Promjer (mm)	2 x 2,2
Uklonno prigušenje tipično (dB)	≤0,25
Prigušenje povratnog toka tipično (dB)	APC ≥60 / UPC ≥50
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60

Mjerne skice: Optički prespojnik kabel DX SC/UPC-LC/APC, 9/125µm OS2, 2,0m

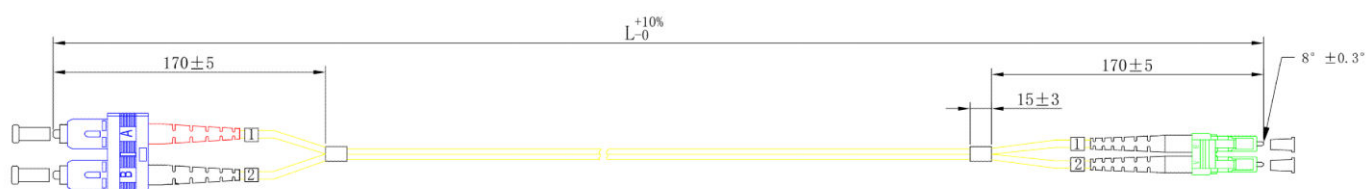

OPIS

KAT. BROJ

Optički prespojni kabel DX SC/UPC-LC/APC, 9/125µm OS2, 2,0m
LSOH, žuti

HLP29CM02F