


Tehnički list za artikl: HLP29LD01F

Optički prespojni kabel DX LC/UPC-SC/APC, 9/125µm OS2, 1,0m

LSOH, žuti



SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - SC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

Tehnički podaci

Norma	IEC 61300-3-4 / IEC 61300-3-6
Utikač - Norma	IEC 61754
Kombinacija utičnica	LC UPC/SC APC
Duljina prespojnog kabla (m)	1,0
Vlakno	singlemodno 9/125µm OS1
Vanjski omotač kabla	LSOH
Boja	žuta
Promjer (mm)	2 x 2,2
Uklopno prigušenje tipično (dB)	≤0,25
Prigušenje povratnog toka tipično (dB)	APC ≥60 / UPC ≥50
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	210,00
Neto visina (mm)	300,00
Neto masa (kg)	0,08

Mjerne skice: Optički prespojni kabel DX LC/UPC-SC/APC, 9/125µm OS2, 1,0m

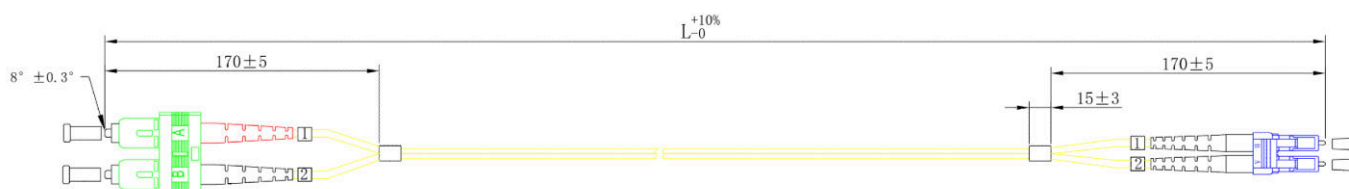

OPIS	KAT. BROJ
Optički prespojni kabel DX LC/UPC-SC/APC, 9/125µm OS2, 1,0m LSOH, žuti	HLP29LD01F