


Tehnički list za artikl: HLP29LL03F

Optički prespojni kabel duplex, LC/LC, 9/125µm OS2, 3.0m

Žuti, 3.0m, LSH0

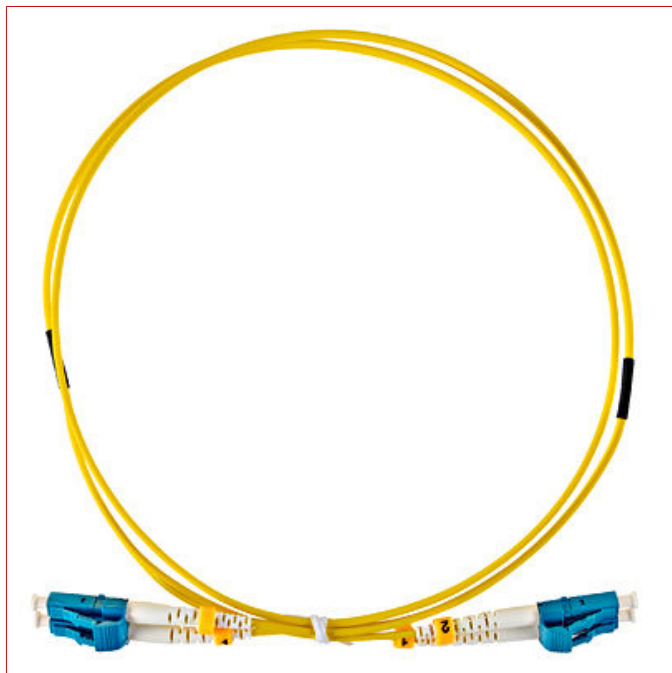

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Norma	IEC 61300-3-4 / IEC 61300-3-6
Utikač - Norma	IEC 61754
Kombinacija utičnica	LC/LC
Tipovi utikača	LC Promjer ferula 1,25mm
Duljina prespojnog kabela (m)	3,0
Vlakno	singlemodno 9/125µm OS1
Vanjski omotač kabela	LS0H
Boja	žuta
Promjer (mm)	2 x 2,2
Uklopno prigušenje tipično (dB)	≤0,25
Prigušenje povratnog toka tipično (dB)	≥50
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	200,00
Neto visina (mm)	300,00
Neto masa (kg)	0,11

Mjerne skice: Optički prespojni kabel duplex, LC/LC, 9/125µm OS2, 3.0m

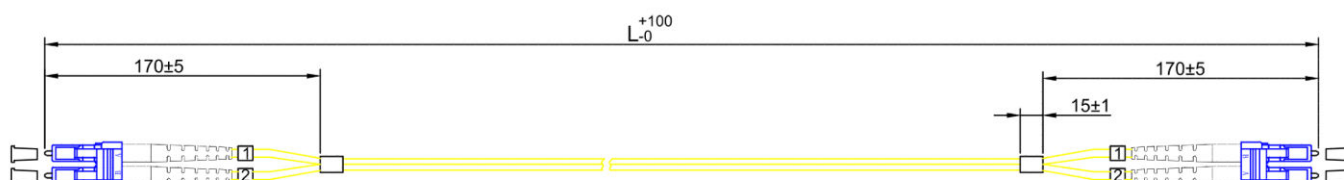

OPIS

KAT. BROJ

Optički prespojni kabel duplex, LC/LC, 9/125µm OS2, 3.0m
žuti, 3.0m, LSH0

HLP29LL03F