


Tehnički list za artikl: HLP2SLL00F

# Optički prespojni kabel DX LC/UPC-LC/ UPC, 50/125µm OM5, LSOH

limeta zeleni, 0.5m



## SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

### FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

### APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



## Tehnički podaci

|                                        |                               |
|----------------------------------------|-------------------------------|
| Neto širina (mm)                       | 150,00                        |
| Neto visina (mm)                       | 200,00                        |
| Neto masa (kg)                         | 0,04                          |
| Norma                                  | IEC 61300-3-4 / IEC 61300-3-6 |
| Utikač - Norma                         | IEC 61754                     |
| Kombinacija utičnica                   | LC/LC                         |
| Duljina prespojnog kabela (m)          | 0,50                          |
| Vlakno                                 | 50/125 OM5 Multimode          |
| Vanjski omotač kabela                  | LS0H                          |
| Boja                                   | limeta zelena                 |
| Uklopno prigušenje tipično (dB)        | $\leq 0,25$                   |
| Prigušenje povratnog toka tipično (dB) | $\geq 30$                     |
| Min. temperatura okoline (°C)          | -20                           |
| Maks. temperatura okoline (°C)         | 60                            |

## Mjerne skice: Optički prespojni kabel DX LC/UPC-LC/UPC, 50/ 125µm OM5, LS0H

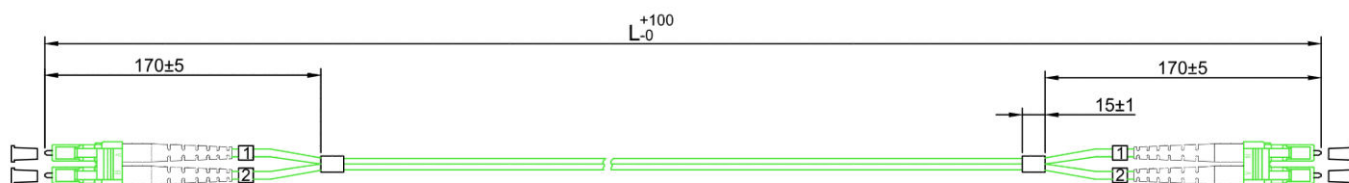

OPIS

KAT. BROJ

Optički prespojni kabel DX LC/UPC-LC/UPC, 50/125µm OM5,LSOH  
limeta zeleni, 0.5m

HLP2SLL00F