


Tehnički list za artikl: HLP2SLL10F

Optički prespojni kabel DX LC/UPC-LC/ UPC, 50/125µm OM5, LSOH

limeta zeleni, 10.0m



Schrack-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Neto širina (mm)	300,00
Neto visina (mm)	350,00
Neto masa (kg)	0,53
Norma	IEC 61300-3-4 / IEC 61300-3-6
Utikač - Norma	IEC 61754
Kombinacija utičnica	LC/LC
Duljina prespojnog kabela (m)	10
Vlakno	50/125 OM5 Multimode
Vanjski omotač kabela	LS0H
Boja	limeta zelena
Uklopno prigušenje tipično (dB)	$\leq 0,25$
Prigušenje povratnog toka tipično (dB)	≥ 30
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60

Mjerne skice: Optički prespojni kabel DX LC/UPC-LC/UPC, 50/ 125µm OM5, LS0H

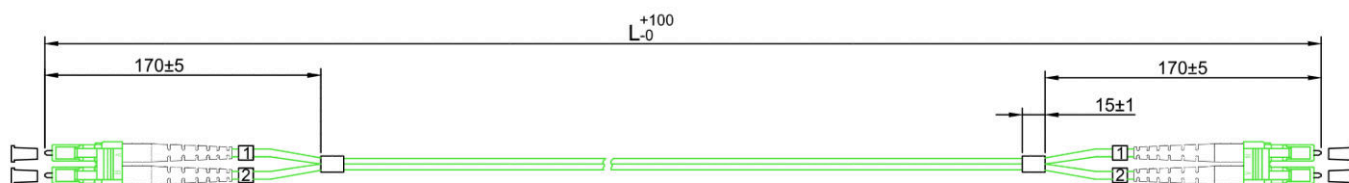

OPIS

KAT. BROJ

Optički prespojni kabel DX LC/UPC-LC/UPC, 50/125µm OM5,LSOH
limeta zeleni, 10.0m

HLP2SLL10F