






Tehnički list za artikl: HSELS045TG

Opt. razdjelnik, 4 niti, ST, 50/ 125µm OM2, izvlačivi, 19", 1U

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM

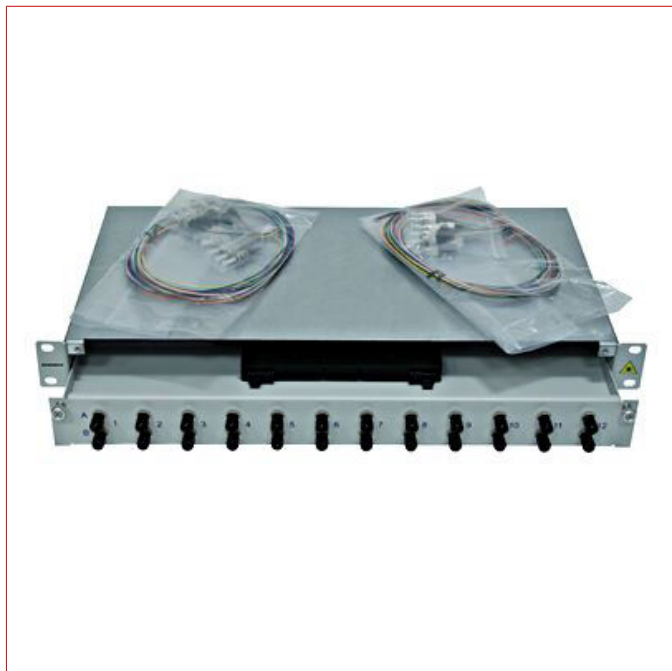

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open

Standards:

50173-1, EN 61300-3-6, EN 61300-3-41

Tehnički podaci

Neto širina (mm)	482,50
Neto visina (mm)	43,60
Neto dubina (mm)	211,50
Neto masa (kg)	2,70
Boja	RAL 7035 (svijetlo siva)
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	70
Vlakno	multimodno 50/125µm OM2
Broj vlakana	4
Spojnicica	ST

Dimenzionalni nacrt

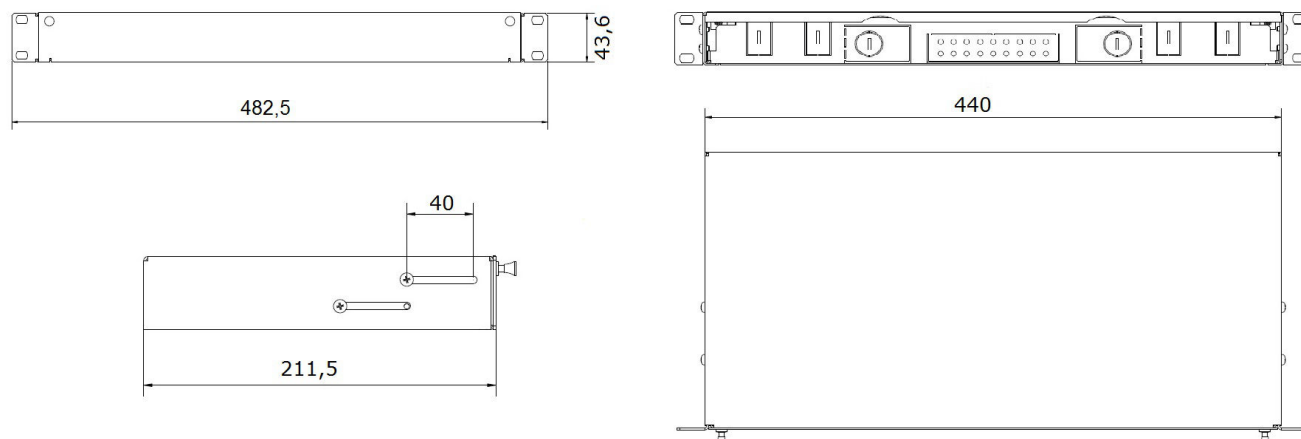


Tabela artikla

OPIS	KAT. BROJ
Opt. razdjelnik, 4 niti, ST, 50/125µm OM2, izvlačivi, 19", 1U acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	HSELS045TG
Dodatni pribor	
Optička cjevčica za zaštitu spoja 60mm	HELSP00011
Optička cjevčica za zaštitu spoja 40mm	HELSP00010
Optički prespojni kabel duplex, ST/ST, 50/125µm OM2, 2.0m	HLP25TT02F
Optički prespojni kabel duplex, ST/ST, 50/125µm OM2, 5.0m	HLP25TT05F
Optički prespojni kabel duplex, ST/SC, 50/125µm OM2, 2.0m	HLP25TC02F
Optički prespojni kabel duplex, ST/SC, 50/125µm OM2, 5.0m	HLP25TC05F
Optički prespojni kabel duplex, LC/SC, 50/125µm OM2, 2.0m	HLP25LC02F
Optički prespojni kabel duplex, LC/SC, 50/125µm OM2, 5.0m	HLP25LC05F