

Tehnički list za artikl: HSELS04SCG

Optički prespojni panel 19", 1U, uklj. 4 spojnice SC SM

RAL7035, PREMIUM



Tehnički podaci

Neto širina (mm)	482,50
Neto visina (mm)	43,60
Neto dubina (mm)	211,50
Neto masa (kg)	2,70
Vlakno	singlemodno 9/125μm OS1
Boja	RAL 7035 (svijetlo siva)
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	70

Dimenzionalni nacrt

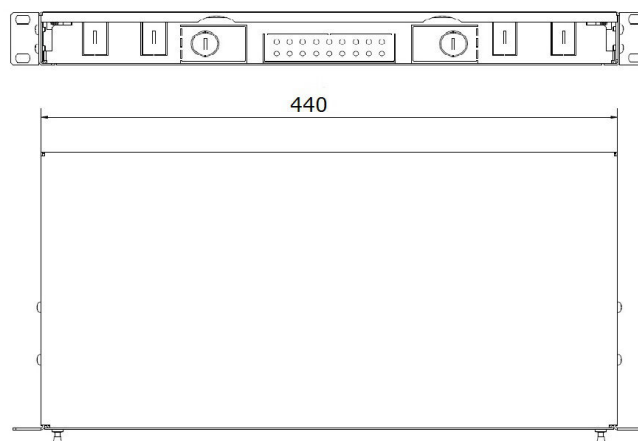


Tabela artikla

OPIS	KAT. BROJ
Optički prespojni panel 19", 1U, uklj. 4 spojnice SC SM RAL7035, PREMIUM	HSLS04SCG
Dodatni pribor	
Optički pr. kabel duplex SC/UPC - SC/UPC, 9/125µm OS2, LSH0 žuti, 2.0m, LSH0	HLP29CC02F
Optički pr. kabel duplex SC/UPC - SC/UPC, 9/125µm OS2, LSH0 žuti, 5.0m, LSH0	HLP29CC05F
Optički prespojni kabel duplex, LC/SC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29LC02F
Optički prespojni kabel duplex, LC/UPC - SC/UPC, 9/125µm OS2 žuti, 5.0m, LSH0	HLP29LC05F
Optički prespojni kabel duplex, ST/SC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29TC02F
Optički prespojni kabel duplex, ST/SC, 9/125µm OS2, 5.0m žuti, 5.0m, LSH0	HLP29TC05F
Optički prespojni kabel duplex, SC/FC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29CF02F
Optički prespojni kabel duplex, SC/FC, 9/125µm OS2, 5.0m žuti, 5.0m, LSH0	HLP29CF05F