





Tehnički list za artikl: HSELS085LG

# Opt. razdjelnik, 8 niti, LC, 50/125µm OM2, izvlačivi, 19", 1U

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM



## SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

### Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open


### Standards:

50173-1, EN 61300-3-6, EN 61300-3-52

## Tehnički podaci

|                                |                          |
|--------------------------------|--------------------------|
| Neto širina (mm)               | 482,50                   |
| Neto visina (mm)               | 43,60                    |
| Neto dubina (mm)               | 211,50                   |
| Neto masa (kg)                 | 2,70                     |
| Boja                           | RAL 7035 (svijetlo siva) |
| Min. temperatura okoline (°C)  | -10                      |
| Maks. temperatura okoline (°C) | 70                       |
| Vlakno                         | multimodno 50/125µm OM2  |
| Broj vlakana                   | 8                        |
| Spojnicica                     | LC                       |

## Dimenzionalni nacrt

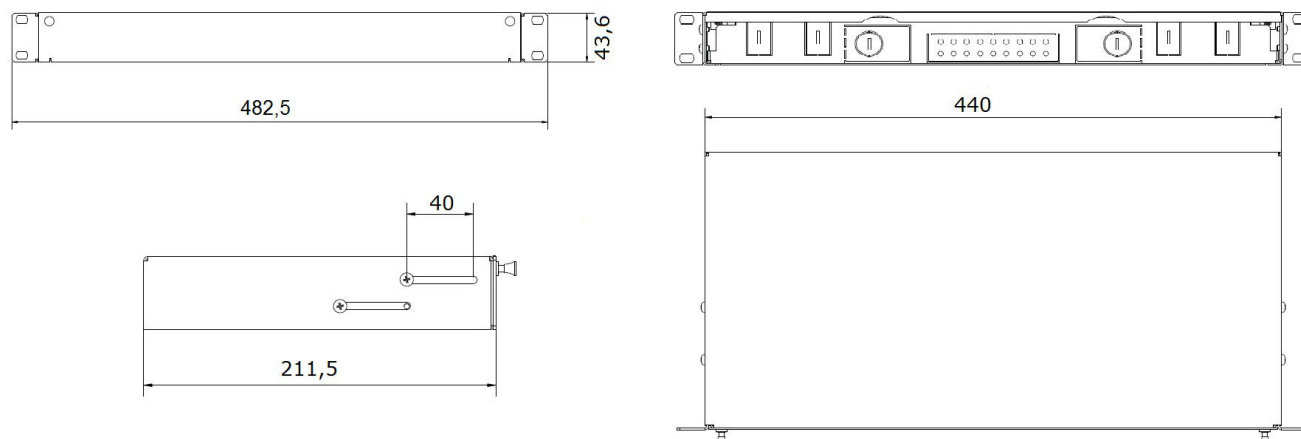

## Tabela artikla

| OPIS                                                                                                                                                               | KAT. BROJ  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Opt. razdjelnik, 8 niti, LC, 50/125µm OM2, izvlačivi, 19", 1U<br>acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM | HSELS085LG |
| <b>Dodatni pribor</b>                                                                                                                                              |            |
| Optička cjevčica za zaštitu spoja 60mm                                                                                                                             | HELSP00011 |
| Optička cjevčica za zaštitu spoja 40mm                                                                                                                             | HELSP00010 |
| Optički prespojni kabel duplex, LC/LC, 50/125µm OM2, 2.0m                                                                                                          | HLP25LL02F |
| Optički prespojni kabel duplex, LC/LC, 50/125µm OM2, 5.0m                                                                                                          | HLP25LL05F |
| Optički prespojni kabel duplex, LC/SC, 50/125µm OM2, 2.0m                                                                                                          | HLP25LC02F |
| Optički prespojni kabel duplex, LC/SC, 50/125µm OM2, 5.0m                                                                                                          | HLP25LC05F |
| Optički prespojni kabel duplex, LC/ST, 50/125µm OM2, 2.0m                                                                                                          | HLP25LT02F |
| Optički prespojni kabel duplex, LC/ST, 50/125µm OM2, 5.0m                                                                                                          | HLP25LT05F |