


Tehnički list za artikl: HSELS16SLG

Optički prespojni panel 19", 1U, uklj. 16 spojnica LC SM

RAL7035, PREMIUM



Tehnički podaci

Neto širina (mm)	482,50
Neto visina (mm)	43,60
Neto dubina (mm)	211,50
Neto masa (kg)	2,70
Vlakno	singlemodno 9/125µm OS1
Boja	RAL 7035 (svijetlo siva)
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	70

Dimension drawing

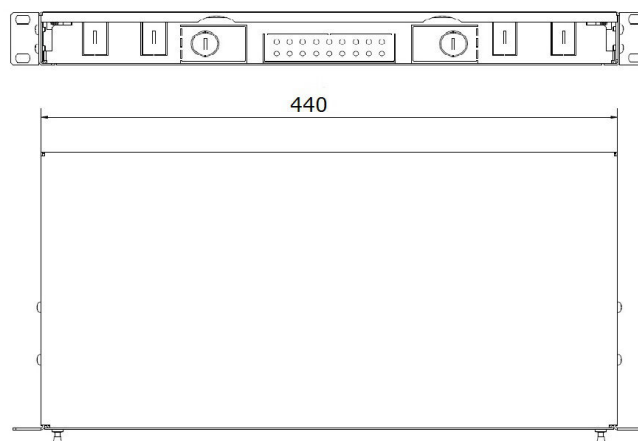
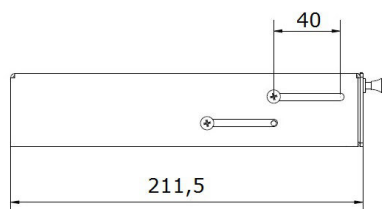
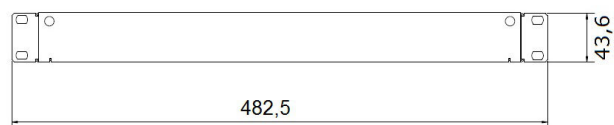


Tabela artikla

OPIS	KAT. BROJ
Optički prespojni panel 19", 1U, uklj. 16 spojnice LC SM RAL7035, PREMIUM	HSLS16SLG
Dodatni pribor	
Optički prespojni kabel duplex, LC/LC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29LL02F
Optički prespojni kabel duplex, LC/LC, 9/125µm OS2, 5.0m žuti, 5.0m, LSH0	HLP29LL05F
Optički prespojni kabel duplex, LC/SC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29LC02F
Optički prespojni kabel duplex, LC/UPC - SC/UPC, 9/125µm OS2 žuti, 5.0m, LSH0	HLP29LC05F
Optički prespojni kabel duplex, LC/FC, 9/125µm OS2, 2.0m žuti, 2.0m, LSH0	HLP29LF02F