


Tehnički list za artikl: IL144339-A

# Metering insert 3-39E compl. 3 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

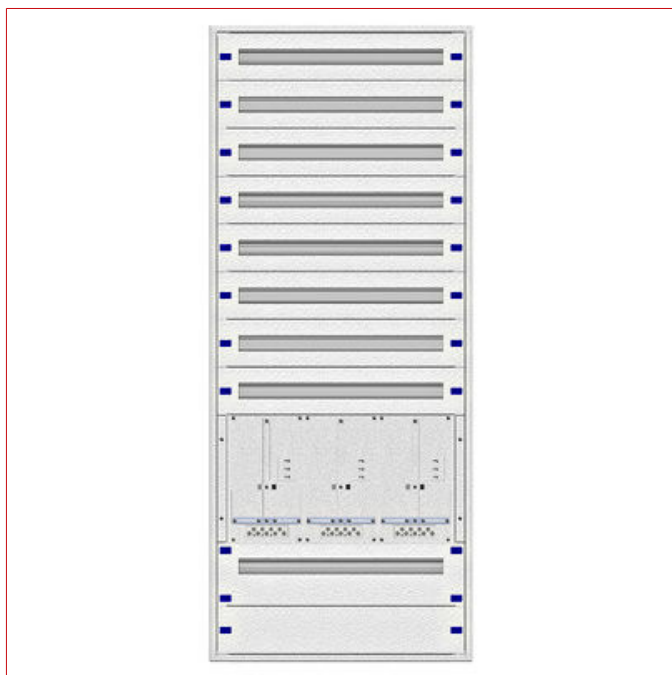

## Tehnički podaci

|                   |                                 |
|-------------------|---------------------------------|
| Neto širina (mm)  | 720,00                          |
| Neto visina (mm)  | 1.795,00                        |
| Neto dubina (mm)  | 150,00                          |
| EAN               | 9004840961485                   |
| Tip               | Umetak za razdjelnik s brojiлом |
| Regija            | Beč                             |
| Umetci            | Prednja maska metalna           |
| Boja              | RAL 7035                        |
| Širina brojila    | 3                               |
| Visinska jedinica | 39                              |
| Redova brojila    | 1                               |
| Mjesta za brojila | 3                               |
| Daljni redovi     | 8                               |
| Pokrovn ploča     | Čelik                           |
| Osnovna oznaka    | Umetak                          |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Metering insert 3-39E compl. 3 cou. pl. front pl. st. Wien<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                                 |                    | IL144339-A |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                          |                    |            |
| Set za uzemljenje 300mm P/F 6mm Ž-Z<br>Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci                                                                                                                                                                                                                      |                    | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |