


Tehnički list za artikl: IL153118WS

# Masken-Zählerverteiler 1M-18E/WIEN 1ZP, H875B330T200mm

1 Mjesta za brojila, 1 Redova brojila, 1 Daljni redovi, 13 Modularnih širina, Pokrovna ploča  
Čelik, Beč

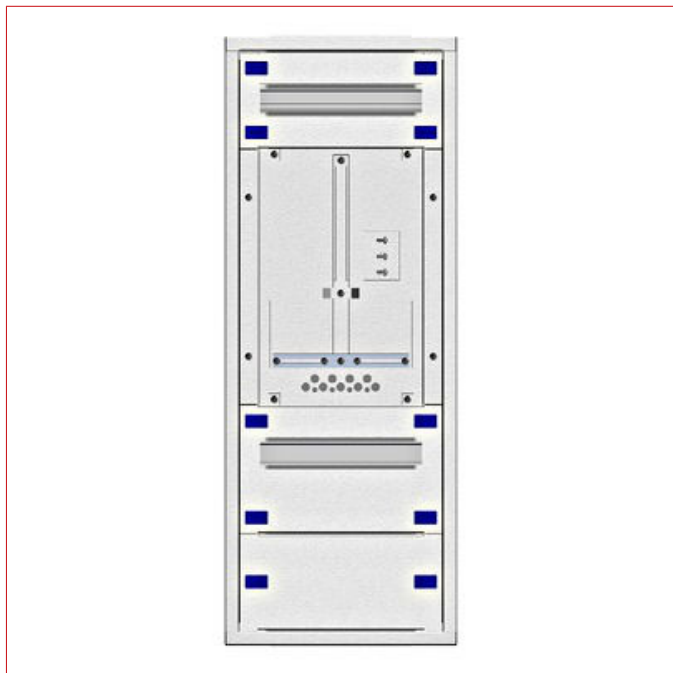

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler ohne Tür und PVC-Rückwand
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung Ue: 230/400V/50Hz
- Bemessungsisolationsspannung Ui: 1000V
- Bemessungsstoßspannungsfestigkeit Uimp: 6kV
- Bemessungskurzzeitstromfestigkeit Icw: 25kA / 1s
- Bemessungsstoßstromfestigkeit Ipk: 54kA
- Bedingter Bemessungskurzschlussstrom Icc: 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage
-



## Tehnički podaci

|                      |                                           |
|----------------------|-------------------------------------------|
| Neto širina (mm)     | 330,00                                    |
| Neto visina (mm)     | 875,00                                    |
| Neto dubina (mm)     | 200,00                                    |
| EAN                  | 9004840629187                             |
| Disipacija snage (W) | -156,00                                   |
| Tip                  | Maskirni razdjelnik sa brojilom (komplet) |
| Regija               | Beč                                       |
| Umetci               | Prednja maska metalna                     |
| Boja                 | RAL 7035                                  |
| Širina brojila       | 1                                         |
| Visinska jedinica    | 18                                        |
| Redova brojila       | 1                                         |
| Mjesta za brojila    | 1                                         |
| IP stupanj zaštite   | IP20C                                     |
| Daljni redovi        | 1                                         |
| Pokrovna ploča       | Čelik                                     |
| Osnovna oznaka       | Kućište                                   |
| Modularnih širina    | 13                                        |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                                                                                         | MASA BAKRA (kg/km) | KAT. BROJ  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Masken-Zählerteiler 1M-18E/WIEN 1ZP, H875B330T200mm<br>1 Mjesta za brojila, 1 Redova brojila, 1 Daljni redovi, 13 Modularnih širina, Pokrovna ploča Čelik,<br>Beč                                                                                                                                                                                            |                    | IL153118WS |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                        |                    |            |
| Postolje za nazidne razdjelnike, bočni dio, 200mm (par)                                                                                                                                                                                                                                                                                                      |                    | IL091120   |
| Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva                                                                                                                                                                                                                                                                                                  |                    | BK002401   |
| Pokrovna traka, slijepa, glatka, siva, duljine 1m<br>pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                                                                                                                                                                                                             |                    | IL900251   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over<br>all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped<br>ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |