


Tehnički list za artikl: IL154583GS

# Masken-Zählerverteiler 5M-33G/STMK 10ZP, H1565B1180T200mm V2

10 Mjesta za brojila, 2 Redova brojila, 1 Daljni redovi, 21 Modularnih širina, Pokrovna ploča  
Čelik, Štajerska

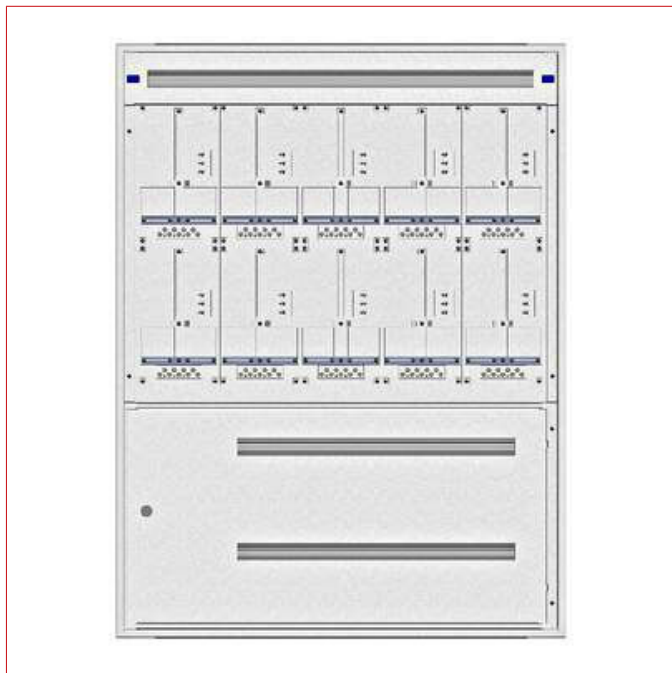

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                      |                                           |
|----------------------|-------------------------------------------|
| Neto širina (mm)     | 1.180,00                                  |
| Neto visina (mm)     | 1.565,00                                  |
| Neto dubina (mm)     | 200,00                                    |
| EAN                  | 9004840637823                             |
| Disipacija snage (W) | -670,00                                   |
| Tip                  | Maskirni razdjelnik sa brojilom (komplet) |
| Regija               | Štajerska                                 |
| Umetci               | Prednja maska metalna                     |
| Boja                 | RAL 7035                                  |
| Širina brojila       | 5                                         |
| Visinska jedinica    | 33                                        |
| Redova brojila       | 2                                         |
| Mjesta za brojila    | 10                                        |
| IP stupanj zaštite   | IP20C                                     |
| Daljni redovi        | 1                                         |
| Pokrovna ploča       | Čelik                                     |
| Osnovna oznaka       | Kućište                                   |
| Modularnih širina    | 21                                        |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Masken-Zählerverteiler 5M-33G/STMK 10ZP, H1565B1180T200mm V2                                                                                                                                                                                                                                   |                    |            |
| 10 Mjesta za brojila, 2 Redova brojila, 1 Daljni redovi, 21 Modularnih širina, Pokrovna ploča                                                                                                                                                                                                  |                    | IL154583GS |
| Čelik, Štajerska                                                                                                                                                                                                                                                                               |                    |            |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Postolje za nazidne razdjelnike, bočni dio, 200mm (par)                                                                                                                                                                                                                                        |                    | IL091120   |
| Podnožje, prednji dio, za razdjelnike 5A../.                                                                                                                                                                                                                                                   |                    | IL091050   |
| Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva                                                                                                                                                                                                                                    |                    | BK002401   |
| Pokrovna traka, slijepa, glatka, siva, duljine 1m                                                                                                                                                                                                                                              |                    | IL900251   |
| pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                                                                                                                                                                                                    |                    |            |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |