


Tehnički list za artikl: IL166483GS

# Unterputz-Zählerverteiler 4U-33G/STMK 8ZP, H1605B1030T250mmV2

8 Mjesta za brojila, 2 Redova brojila, 1 Daljni redovi, 45 Modularnih širina, Pokrovna ploča  
Čelik, Štajerska

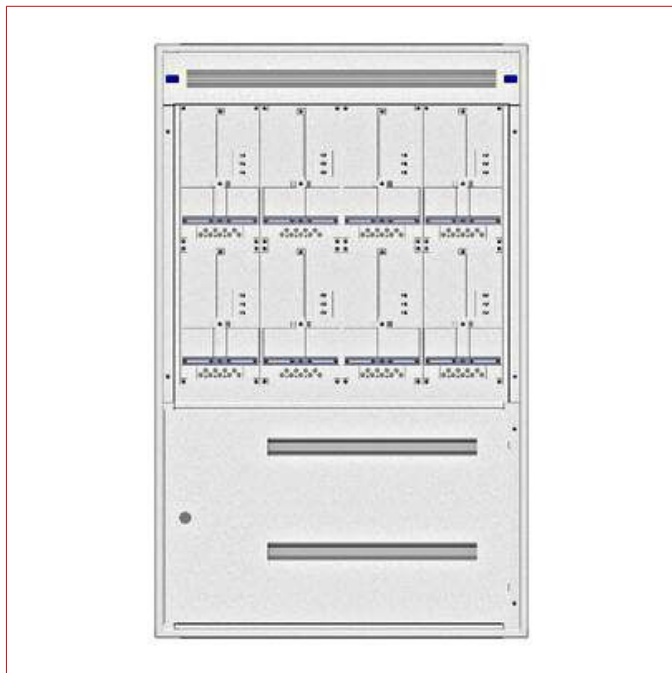

## SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungs kurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungs kurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß)

- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                      |                                                  |
|----------------------|--------------------------------------------------|
| Neto širina (mm)     | 590,00                                           |
| Neto visina (mm)     | 1.605,00                                         |
| Neto dubina (mm)     | 250,00                                           |
| EAN                  | 9004840645385                                    |
| Disipacija snage (W) | -557,00                                          |
| Tip                  | Uzidni razdjelnik s umetkom za brojila (komplet) |
| Regija               | Štajerska                                        |
| Umetci               | Prednja maska metalna                            |
| Boja                 | RAL 9016                                         |
| Širina brojila       | 4                                                |
| Visinska jedinica    | 33                                               |
| Redova brojila       | 2                                                |
| Mjesta za brojila    | 8                                                |
| IP stupanj zaštite   | IP20C                                            |
| Daljni redovi        | 1                                                |
| Pokrovna ploča       | Čelik                                            |
| Osnovna oznaka       | Kućište                                          |
| Modularnih širina    | 45                                               |

## Tabela artikla

| OPIS                                                                                                                                                                          | MASA BAKRA (kg/km) | KAT. BROJ  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Unterputz-Zählerverteiler 4U-33G/STMK 8ZP,H1605B1030T250mmV2<br>8 Mjesta za brojila, 2 Redova brojila, 1 Daljni redovi, 45 Modularnih širina, Pokrovna ploča Čelik, Štajerska |                    | IL166483GS |
| <b>Dodatni pribor</b>                                                                                                                                                         |                    |            |
| Brava 61005<br>s jednim ključem                                                                                                                                               |                    | IL900200-F |
| Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva                                                                                                                   |                    | BK002401   |
| Pokrovna traka, slijepa, glatka, siva, duljine 1m<br>pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                              |                    | IL900251   |
| Vertikalni spojni nosači<br>2 kom. nosača i 4 kom. M5x12 vijaka                                                                                                               |                    | IL369001   |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Z-metalna cilindar brava za MODUL razdjelnike, 2 ključa<br>s dva ključa                                                                                                                                                                                                                        |                    | IL900201-F |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |