

Tehnički list za artikl: INSR2340--

Glavna sklopka za isklop u nuždi, 3-pola, DIN nosač, 40A

Izvedba/tip Emergency sklopka, Nazivna struja 40A, Polovi 3, IP stupanj zaštite IP40 (front), IP20 (terminals)



Tehnički podaci

Izvedba/tip	Emergency sklopka
Nazivna struja (A)	40
Polovi	3
Način montaže	DIN nosač
Norma	IEC 60947, EN 60947, VDE 0660
Nazivni napon izolacije [Ui] (V)	690
Nazivni udarni podnosivi napon [Uimp] (V)	6000
Nazivna kratkotrajno podnosiva struja Icw	1000
Nazivna struja kratkog spoja	10kA @ 440V / 6kA @ 690V
Kratkospojna zaštita, maks. rastalni osigurač	50
Frekvencija (Hz)	50/60


Tehnički podaci - nastavak

Operating Current	AC-23A - 400V - 29A AC-3 - 230V - 27A AC-21A - 690V - 40A AC-22A - 690V - 40A AC-23A - 230V - 27A AC-23A - 690V - 17A AC-3 - 400V - 22A AC-3 - 690V - 13A
Switching Capacity	AC-3 - 400V - 11.5kW AC-3 - 690V - 11.5kW AC-23A - 230V - 7.5kW AC-23A - 690V - 15kW AC-23A - 400V - 15kW AC-3 - 230V - 7.5kW
According to UL 508 / CSA	
Tip priključka	UL/CSA - AWG 14-6
Radni napon AC (V)	600
Thermal rated continuous current (A)	40
Active Power	1x240VAC - 4Hp 3x120VAC - 5Hp 3x600VAC - 22Hp 3x480VAC - 20Hp 1x120VAC - 2Hp 3x240VAC - 10Hp
Priključak	
Konvencionalna termička struja Ith (A)	40
MOment pritezanja (Nm)	3
Presjek priključnih vodiča, višežilni kabel (mm ²)	2,5-16
Presjek priključnih vodiča, Jednožični (mm ²)	2,5-16
Presjek priključnih vodiča, finožični kabel s tuljkom (mm ²)	2,5-16
Retrofit contacts	
Pomoćni kontakti	Maximum 2x INSHK001 -- permitted. 1x INSHK001 -- can be snapped on to the left side of the main contact and 1x INSHK001 -- to the right side of the main contact. Maximum configuration 2x NC contact / 2x NO contact. The switching behavior is the same regardless of whether the auxiliary contact is snapped on to the left or right side of the main contact.
Neutral conductor contacts	ATTENTION! If this 3-pole switch is converted to a 4-pole switch using neutral conductor contact INSNK011 --, no additional auxiliary contact can be snapped onto the N contact. On the other side, auxiliary contact INSHK001 -- can be used as normal. For further details, see Auxiliary contact and N contact overview
Radna temperatura	-25°C to +55°C
Mehanički životni vijek	100000 switching cycles




Tehnički podaci - nastavak

Gubitak snage po polu (W)	2,40
Zaštita od dodira	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP stupanj zaštite	IP40 (front), IP20 (terminals)
Lockable	With 2 locks, each with a shackle lock diameter of 4-6 mm
Neto duljina (mm)	70,00
Neto širina (mm)	35,50
Neto visina (mm)	45,00
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	55


Schaltbild INSR2340--



Maßbild INSR2340--

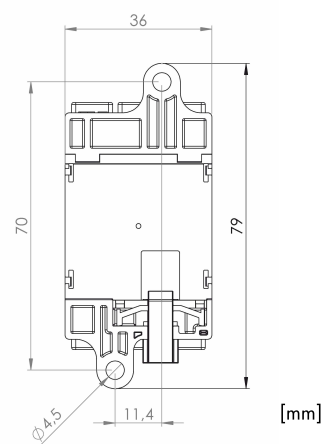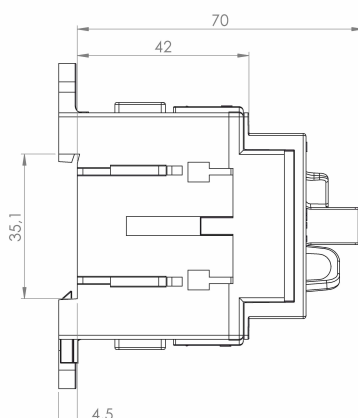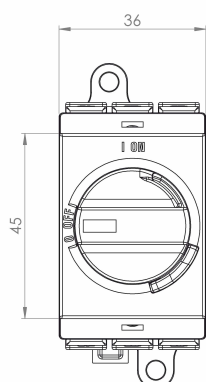

Montageanleitung INSR Hutschienenmontage Schalter

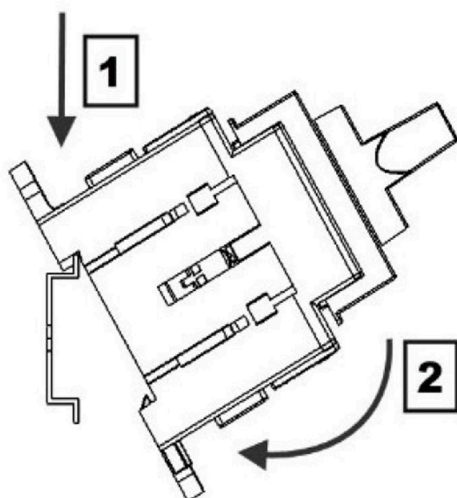

Montageanleitung INSHK Hilfskontakte bei Verwendung von INSNK Neutraleiterkontakte

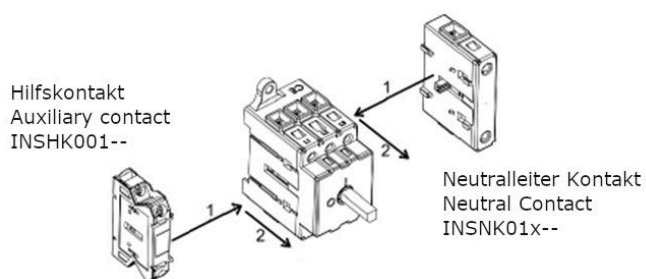


Tabela artikla

OPIS	KAT. BROJ
Glavna sklopka za isklup u nuždi, 3-pola, DIN nosač, 40A	INSR2340
Izvedba/tip Emergency sklopka, Nazivna struja 40A, Polovi 3, IP stupanj zaštite IP40 (front), IP20 (terminals)	
Dodatni pribor	
Pomoćni kontakt 1NO/1NC za INSR, INSP i INSA	INSHK001
Nije dopušteno koristiti za INSE, Izvedba/tip Pribor, IP stupanj zaštite IP20 (terminals)	
N-kontakt za 3-polne INSR, INSP i INSA sklopke, 40-63A	
N-kontakt koji se može naknadno pričvrstiti kako bi se 3-polni sklopnik preradio u 4-polni. Smije se koristiti samo kod INSR, INSP ili INSNK011	
INSA sklopnika s nazivnom strujom 40–63 A. Nije dopušteno koristiti za INSE!	