


Tehnički list za artikl: IP1086465-

High-current terminal for aluminum and copper, UBAL 50

nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm², grey

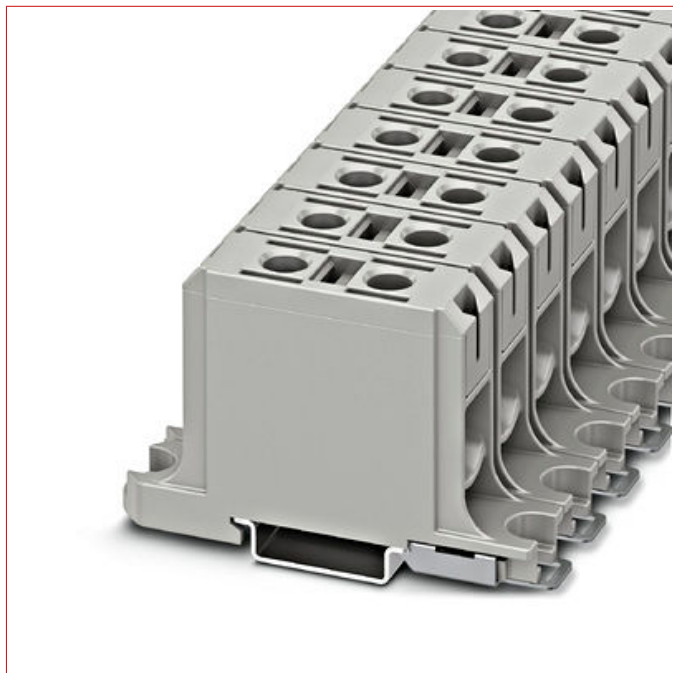

Tehnički podaci

Neto dubina (mm)	51,00
Neto širina (mm)	19,20
Neto visina (mm)	82,50
Neto masa (kg)	0,02
EAN	4055626879208
Disipacija snage (W)	4,73
Min. temperatura okoline (°C)	-60
Maks. temperatura okoline (°C)	85
Osnovna oznaka	Stezaljka
Sistem	Vijčane stezaljke
Serijski	UBAL
Izvedba/tip	Stezaljka jake struje
Maks. presjek, kruti vodič (mm ²)	70
Maks. presjek, fleksibilni vodič (mm ²)	70
Maks. presjek, savitljiva žica s ferulom (mm ²)	50
Min. presjek, kruti vodič (mm ²)	10

Tehnički podaci - nastavak

Min. presjek, fleksibilni vodič (mm ²)	10
Min. poprečni presjek fleksibilni s kablskim završetkom (mm ²)	10
Presjek (mm ²)	70
Boja	siva
Nazivna struja (A)	145

OPIS	KAT. BROJ
High-current terminal for aluminum and copper, UBAL 50 nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm ² , grey	IP1086465