


Tehnički list za artikl: LI1007236-

I-RING, zidna svjetiljka, 9.2W, 3000K, antracit

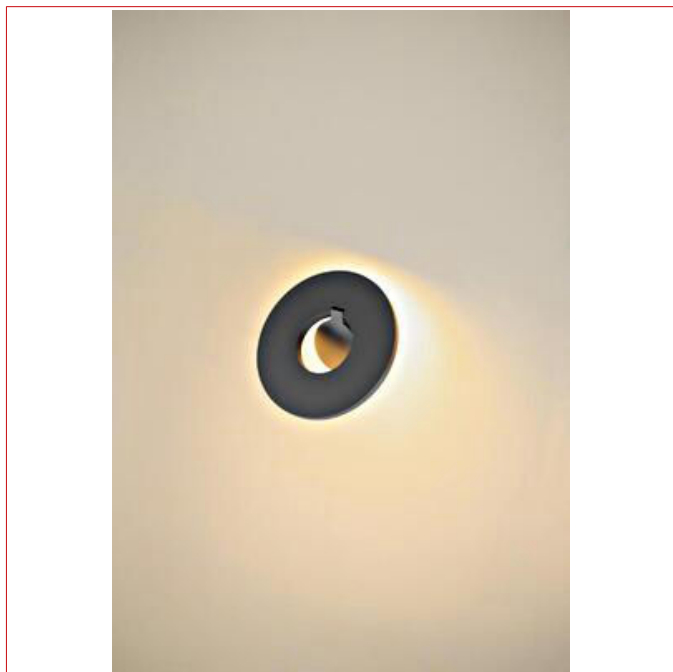

Info o proizvodu

Indirect lighting in an organic ring shape summed up: the new I-RING wall light creates flexible and warm-white (3000K) accented lighting in upmarket outdoor areas thanks to its pivoting and rotatable lamp head. It also prevents light pollution as far as possible. The anthracite-coloured outdoor light is optimally protected thanks to its IP65 rating and features an exceptionally long lifespan of 50,000 hours. A well-rounded lighting experience.

Tehnički podaci

Svjetlosni tok (lm)	670
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥80
Životni vijek	50000
Dimabilno	Ne
Klasa zaštite	I
Energetska klasa	D
Otpornost na udarce	IK05
Vrsta svjetiljke	Zidna nadgradna svjetiljka
inkl.rasvjetno tijelo	da
Grlo	LED Platine

Tehnički podaci - nastavak

Snaga (W)	9,20
Radni napon AC (V)	100-240
Pogonska struja mA (mA)	350
Način montaže	Zidna nadgradna
Boja	antracit
Materijal	Aluminij
Duljina (mm)	240
Visina (mm)	240
Promjer (mm)	240
Dodatni pribor	LI228753--
(DxŠxV) mm	240x240x82
ØxV mm	240x82

Tabela artikla

OPIS	KAT. BROJ
I-RING, zidna svjetiljka, 9.2W, 3000K, antracit	LI1007236
Dodatni pribor	
Set vijaka INOX M8	LI228753