

Tehnički list za artikl: LI115231--

COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K

for AIXLIGHT PRO installation frame



Tehnički podaci

Neto visina (mm)	130,00
Neto promjer (mm)	135,00
Neto masa (kg)	0,51
Način montaže	Stropna ugradna
Boja	srebrno-siva crna
Materijal	Aluminij Staklo
Proizvođač	SLV
Pogonska struja mA (mA)	700
Temperatura boje (K)	4200
Faktor uzvrata boje	90
Svjetlosni tok (lm)	1950
Životni vijek	30.000h
Klasa zaštite	III
Energetska klasa	A++ I A I B
inkl.rasvjetno tijelo	da

Tehnički podaci - nastavak

Promjer (mm)	135
ØxV mm	135x130

Mjerne skice: COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K

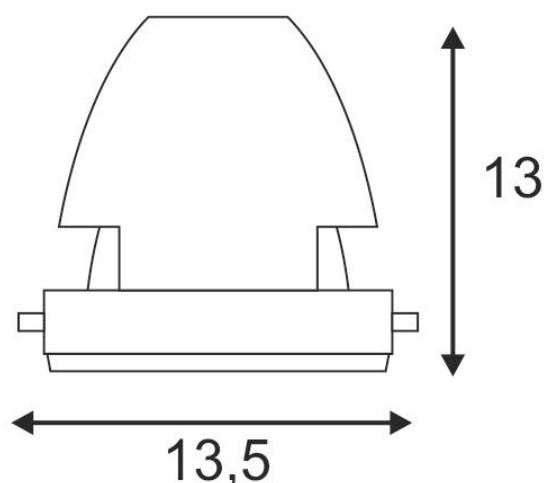


Tabela artikla

OPIS	KAT. BROJ
COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K for AIXLIGHT PRO installation frame	LI115231
Dodatni pribor	
LED Dimer 36W, 700mA, dimabilna	LI1001267
Strukturirano staklo za AIXLIGHT PRO ugradno kućište	LI115170
AIXLIGHT PRO ring, mat- bb, aluminij	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim. inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA	LI464168
LED-Driver, 40W, 700mA, dim.	LI464174
LED Driver 36W, 700mA, dim.	LI464803