

Tehnički list za artikl: LI115233--

COB LED MODULE, srebrno-sive b., 30°, CRI90+, 4200K

for AIXLIGHT PRO installation frame



Tehnički podaci

Svjetlosni tok (lm)	1950
Temperatura boje (K)	4200
Faktor uzvrata boje	≥90
Životni vijek	30.000h
Klasa zaštite	III
inkl.rasvjetno tijelo	da
Pogonska struja mA (mA)	700
Način montaže	Stropna ugradna
Boja	srebrno-siva crna
Materijal	Aluminij Staklo
Visina (mm)	130
Promjer (mm)	135
Masa (kg)	0,516
Dodatni pribor	LI1001267-, LI115170--, LI115600--, LI464032--, LI464168--, LI464174--, LI464803--

Tehnički podaci - nastavak

ØxV mm

135x130

Mjerne skice: COB LED MODULE, srebrno-sive b., 30°, CRI90+, 4200K

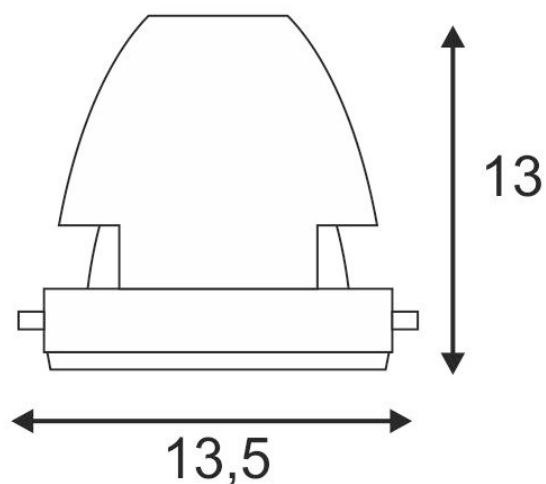


Tabela artikla

OPIS	KAT. BROJ
COB LED MODULE, srebrno-sive b., 30°, CRI90+, 4200K for AIXLIGHT PRO installation frame	LI115233
Dodatni pribor	
LED Dimer 36W, 700mA, dimabilna	LI1001267
Strukturirano staklo za AIXLIGHT PRO ugradno kućište	LI115170
AIXLIGHT PRO ring, mat- bb, aluminij	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim. inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA	LI464168
LED-Driver, 40W, 700mA, dim.	LI464174
LED Driver 36W, 700mA, dim.	LI464803