


Tehnički list za artikl: LI158743--

I-VIDUAL, 3000K, srebrno-sive b., L/W

59.5/59.5 cm

LED panel for grid ceilings

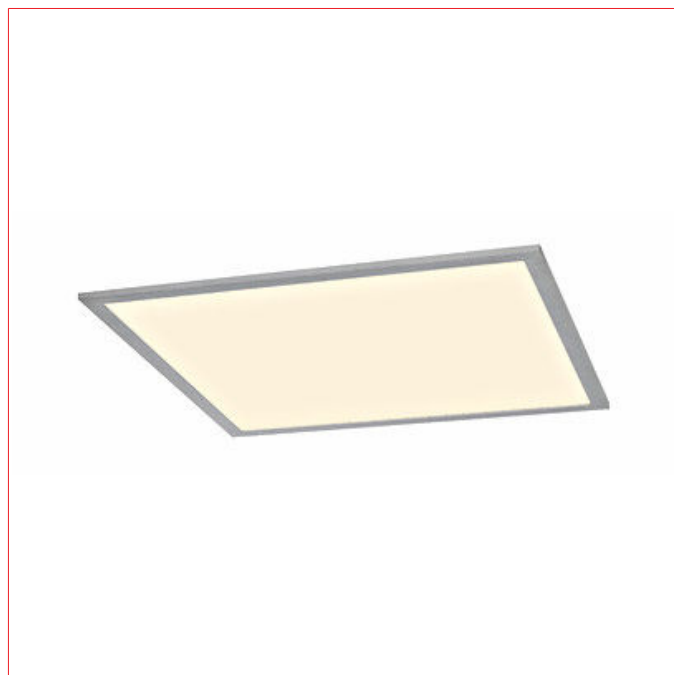

Tehnički podaci

Neto duljina (mm)	595,00
Neto širina (mm)	595,00
Neto visina (mm)	13,00
Neto masa (kg)	3,96
Način montaže	Stropna ugradna
Boja	srebrno-siva
Materijal	Akrilno staklo Aluminij
Proizvođač	SLV
Pogonska struja mA (mA)	1050
Temperatura boje (K)	3000
Faktor uzvrata boje	80
Svjetlosni tok (lm)	3250
Životni vijek	30.000h
Klasa zaštite	III
Energetska klasa	A++ I A I B
Ugradna dubina (mm)	50

Tehnički podaci - nastavak

inkl.rasvjetno tijelo

da

(DxŠxV) mm

595x595x13

Mjerne skice: I-VIDUAL, 3000K, srebrno-sive b., L/W 59.5/59.5 cm

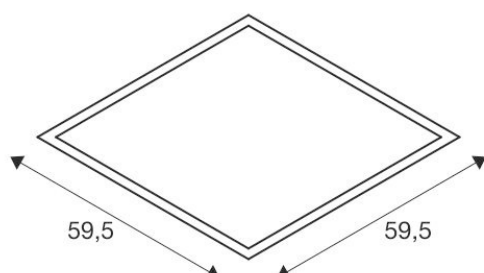


Tabela artikla

OPIS	KAT. BROJ
I-VIDUAL, 3000K, srebrno-sive b., L/W 59.5/59.5 cm	LI158743
LED panel for grid ceilings	
Dodatni pribor	
Univerzalni okvir za LED-Panel, 595x595mm, bijele boje	LI158762
Montažni okvir, srebrno-sive b., L/W 60.5/60.5 cm	LI158764
for I-VIDUAL LED panel	
Rozeta, 10,3cm x 22cm x 5,1cm, bijele boje	LI158791
Ovjesni pribor za LED Panel	LI158799
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim.	LI464032
inkl. Cable relief	
LED-Driver, 40W, 1000mA	LI464170
LED-Driver, 40W, 1000mA, dim.	LI464176