


Tehnički list za artikl: LI38OF0050

Office LED D 38W, 4000K, 4864lm, ECG, L-1,5m

stropna svjetiljka




Tehnički podaci

Neto duljina (mm)	1.500,00
Neto širina (mm)	150,00
Neto visina (mm)	60,00
Neto masa (kg)	4,00
Vrsta svjetiljke	Zidna nadgradna svjetiljka Stropne nadgradne svjetiljke
Način montaže	Stropna nadgradna Zidna nadgradna
Boja	eloksirano
Materijal	Aluminij
Pokrov	Mikroprizmatično
Faktor zasjenjivanja	<19
Pogonski uređaj	LED Driver
Radni napon AC (V)	230

Tehnički podaci - nastavak

Grlo	LED Platine
Efikasnost sustava (lm/W)	128
Snaga (W)	38
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	4864
Broj svjetiljki	1
Životni vijek	50.000h / L80 / B10
Dimabilno	Ne
Klasa zaštite	I
IP stupanj zaštite	IP20
inkl.rasvjetno tijelo	da
(DxŠxV) mm	1500x150x60

Mjerne skice: Office LED D 38W, 4000K, 4864lm, ECG, L-1,5m

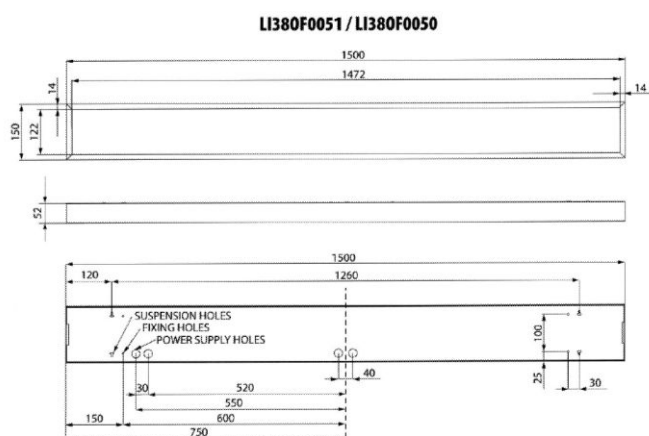

OPIS	KAT. BROJ
Office LED D 38W, 4000K, 4864lm, ECG, L-1,5m stropna svjetiljka	LI38OF0050