

Tehnički list za artikl: LI43619248

RL-MR11 20 2,5W 230V 300° 827 184lm 400cd WFL 15000h L=38mm



Tehnički podaci

Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
Proizvođač	Radium
Svjetlosni tok (lm)	184
Candela	400
Boja svjetla	Toplo bijela komfort
Temperatura boje (K)	2700
Faktor uzvrata boje	≥80
Stabilnot boje MacAdam (sdcm)	≤ 6
Životni vijek	15.000h
Dimabilno	Ne
IP stupanj zaštite	IP20
Energy efficiency class new from 01.09.2021	G
Energetska klasa	A+
Podnožje	GU10
Kut svjetlosti (°)	36
Radni napon AC (V)	12
Izvedbeni oblik	PAR16

Tehnički podaci - nastavak

Promjer (mm)	35
Izvedba/tip	Filament
Snaga (W)	2,50
Snaga (W)	2,50
Faktor snage	≥ 0.90

**Klasa energetske efikasnosti: RL-MR11 20 2,5W 230V 300° 827 184lm 400cd
WFL 15000h L=38mm**

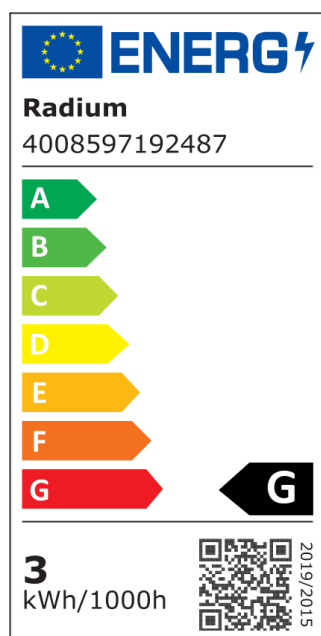


Tabela artikla

OPIS	KAT. BROJ
RL-MR11 20 2,5W 230V 300° 827 184lm 400cd WFL 15000h L=38mm	LI43619248