

Tehnički list za artikl: LI44122562

RL-MR16 35 5W 345lm 927 12V 36° GU5.3

LED niskonaponska reflektorska žarulja



Tehnički podaci

Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
Svjetlosni tok (lm)	345
Boja svjetla	Ultra toplo bijela
Temperatura boje (K)	2700
Faktor uzvrata boje	≥90
Stabilnot boje MacAdam (sdcm)	≤ 6
Životni vijek	25000
Uklonni ciklusi	100000
Dimabilno	Da
IP stupanj zaštite	IP20
KEU	G
Podnožje	GU5,3
Kut svjetlosti (°)	36
Radni napon AC (V)	12
Boja	bistra
Materijal	Staklo
Izvedbeni oblik	PAR16
Duljina (mm)	44

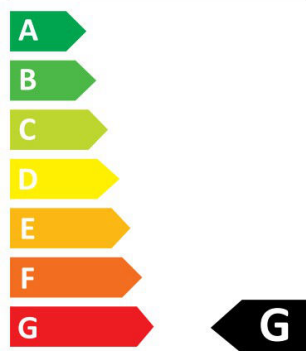
Tehnički podaci - nastavak

Promjer (mm)

50

Klasa energetske efikasnosti: RL-MR16 35 5W 345lm 927 12V 36° GU5.3**Radium**

4008597225628

**5**
kWh/1000h

2019/2015

OPIS

KAT. BROJ

RL-MR16 35 5W 345lm 927 12V 36° GU5.3

LI44122562

LED niskonaponska reflektorska žarulja