



Tehnički list za artikl: LIAR406230

LANO 3 LED 40W 4750lm, 3000K, UGR<19, 1050mA,bb,625x625mm

LED Panel opal, CRI >80, without LED driver

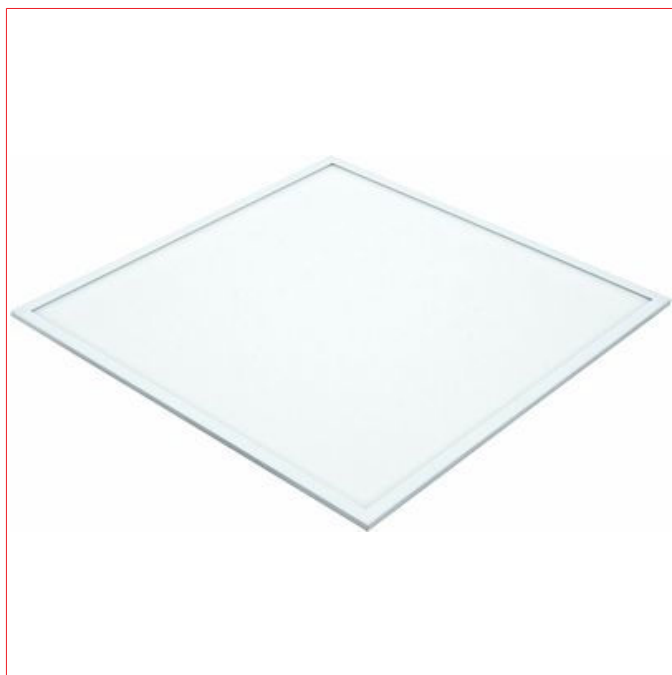

Krivulja raspodjele svjetla



Tehnički podaci

Neto duljina (mm)	620,00
Neto širina (mm)	620,00
Neto visina (mm)	9,00
Neto masa (kg)	3,00
Način montaže	Stropna ugradna Ovjesna
Boja	bijela
Materijal	PMMA Aluminij
Proizvođač	Schrack
Faktor zasjenjivanja	<19 (2H / 4H)

Tehnički podaci - nastavak

Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Grlo	LED Platine
Snaga (W)	40
Efikasnost sustava (lm/W)	115
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	> 80
Svjetlosni tok (lm)	4600
Životni vijek	35.000h / L70 / B10
Dimabilno	Ne
IP stupanj zaštite	IP40
(DxŠxV) mm	620x620x9

Tabela artikla

OPIS	KAT. BROJ
LANO 3 LED 40W 4750lm, 3000K, UGR<19, 1050mA,bb,625x625mm	LIAR406230
LED Panel opal, CRI >80, without LED driver	
Dodatni pribor	
3-polna spojna kutija, IP20, Quick Fix	LID15379
LED driver 1050mA za LANO 3 40W	LIARTR1050
Philips LED Drive Xitanium 44W 0.9/1.05A	
LED Driver 1050mA za LANO 3, 40W, DALI dim 1-100%	LIARTR105D
Tridonic Driver LCA 45W 500-1400 mA one4all SR PRE, DALI Dimmbereich 1 - 100%, IP20	
Ugradni okvir za LED Panel LANO 3 625x625mm,bijele b.	LIAREBR625
	LIARABR626