




Tehnički list za artikl: LID14032--

Lano LED 48W, 3000K, 3600lm, IP20, UGR19, 120°, M625, bb **€CONOMY**

ugradni panel, potreban 1200mA driver



Krivulja raspodjele svjetla



Info o proizvodu

UGR19 62x62 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications. Requires 1200mA LED driver. Complies with standard EN60598-1 and any other specific standards.



Tehnički podaci

Svjetlosni tok (lm)

4000lm

Tehnički podaci - nastavak

Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥80
Dimabilno	Ovisi o driveru Da
Klasa zaštite	III
IP stupanj zaštite	IP20
Vrsta svjetiljke	LED panel
inkl.rasvjetno tijelo	da
Broj svjetiljki	1
Grlo	LED Platine
Kut svjetlosti (°)	120°
Snaga (W)	48
Pogonski uređaj	Needs to be ordered separately
Pogonska struja mA (mA)	1200
Način montaže	Stropna ugradna Ovjesna
Ugradna dubina (mm)	55
Boja	bijela
Materijal	Aluminij
Duljina (mm)	620
Širina (mm)	620
Visina (mm)	10
Dodatni pribor	LID 13401--; LID 15379--; LID 16949--
Potrebni pribor	LID 13319--; LID 13754--; LID 16598--
(DxŠxV) mm	620x620x10
Snaga (W)	48

Mjerne skice: Lano LED 48W, 3000K, 3600lm, IP20, UGR19, 120°, M625, bb

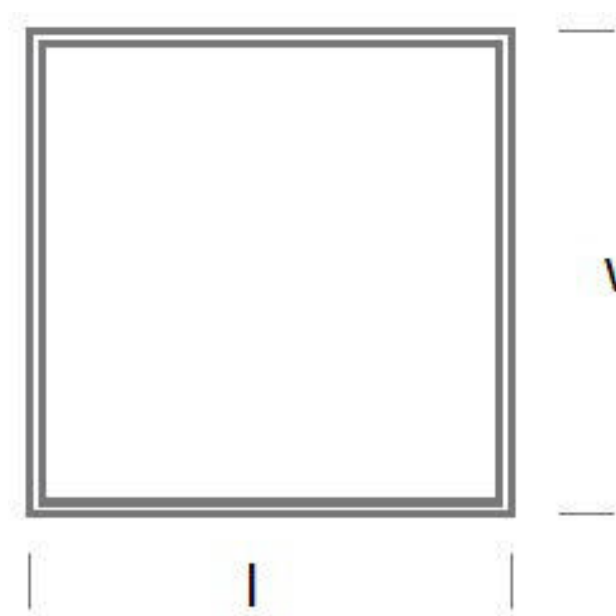


Tabela artikla

OPIS	KAT. BROJ
Lano LED 48W, 3000K, 3600lm, IP20, UGR19, 120°, M625, bb ugradni panel, potreban 1200mA driver	LID14032
Potrebni pribor	
LED Driver za Lano 1200mA 48W LED panele 25 LAMPS	LID13319
LED Driver TRIAC dim. za Lano, 1200mA 48W LED panele 23 DRIVERS	LID13754
LED driver 230V 8-50W 1500mA dimabilni IP20 230V; 23 DRIVERS	LID16598
Dodatni pribor	
Ovjesni pribor za Lano svjetiljke 2 piece for Lano 1200 x 600; 06 DOWNLIGHT FIX LED	LID13401
3-polna spojna kutija, IP20, Quick Fix 26 ACCES&GADGETS	LID15379
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949