


Tehnički list za artikl: LID14752--

Zan LED 30W 700mA 2200lm 4000K 38° IP20, bijele boje

ugradni downlight, potreban 700mA driver

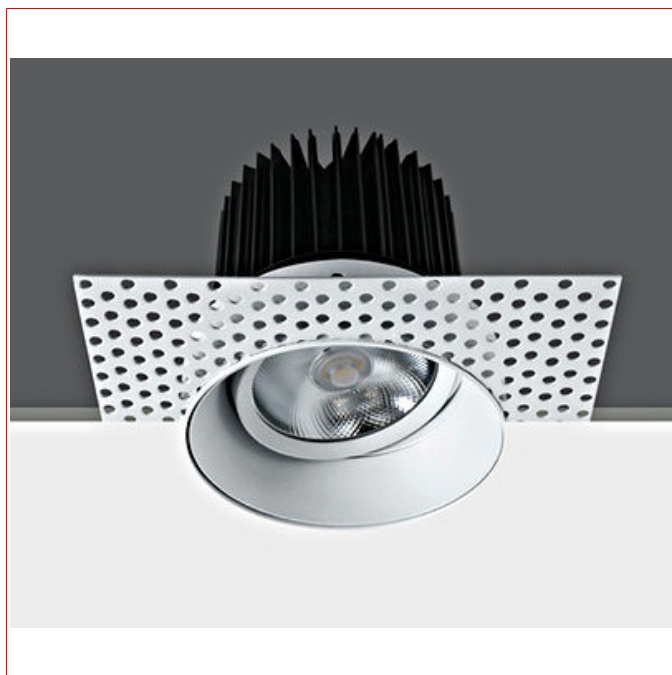

Info o proizvodu

30W COB Recessed adjustable Trimless LED spot, IP20. _x000D_ _x000D_ Requires 700mA driver._x000D_ _x000D_ Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci

Svjetlosni tok (lm)	2200
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000
Faktor uzvrata boje	≥80
Dimabilno	Ne
Klasa zaštite	III
IP stupanj zaštite	IP20
inkl.rasvjetno tijelo	da
Grlo	LED Platine
Kut svjetlosti (°)	38
Snaga (W)	30
Pogonska struja mA (mA)	700
Način montaže	Stropna ugradna

Tehnički podaci - nastavak

Otvor (mm)	Ø 110
Ugradna dubina (mm)	160
Boja	bijela
Materijal	Aluminij
Duljina (mm)	150
Širina (mm)	150
Visina (mm)	125
Promjer (mm)	100
Dodatni pribor	LID 16949--
(DxŠxV) mm	150x150x125
ØxV mm	100x125
OTVOR mm	Ø 110

Mjerne skice: Zan LED 30W 700mA 2200lm 4000K 38° IP20, bijele boje



Tabela artikla

OPIS	KAT. BROJ
Zan LED 30W 700mA 2200lm 4000K 38° IP20, bijele boje ugradni downlight, potreban 700mA driver	LID14752
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949