

Tehnički list za artikl: LID15433--

# Mizar LED 12W, 1020lm, 3000K, IP20, 36°, bijele b.

ugradni zakretni spot reflektor, potreban 350mA driver



## Info o proizvodu

12W COB LED recessed adjustable spot, white with black reflector for general lighting applications. Requires 350mA constant current LED driver. Complies with standard EN60598-1 and any other specific standards.


## Tehnički podaci

|                           |                            |
|---------------------------|----------------------------|
| Svjetlosni tok (lm)       | 1020                       |
| Boja svjetla              | Toplo bijela               |
| Temperatura boje (K)      | 3000                       |
| Faktor uzvrata boje       | ≥90                        |
| Dimabilno                 | Ovisi o driveru<br>Da      |
| Klasa zaštite             | III                        |
| IP stupanj zaštite        | IP20                       |
| Vrsta svjetiljke          | Stropne ugradne svjetiljke |
| inkl.rasvjetno tijelo     | da                         |
| Grlo                      | LED Platine                |
| Kut svjetlosti (°)        | 36                         |
| Efikasnost sustava (lm/W) | 85                         |

## Tehnički podaci - nastavak

|                         |                                |
|-------------------------|--------------------------------|
| Snaga (W)               | 12                             |
| Pogonski uređaj         | Needs to be ordered separately |
| Pogonska struja mA (mA) | 350                            |
| Ulazna struja (A)       | 0,35                           |
| Način montaže           | Stropna ugradna                |
| Otvor (mm)              | Ø 55                           |
| Ugradna dubina (mm)     | 50                             |
| Boja                    | bijela                         |
| Materijal               | Aluminij                       |
| Visina (mm)             | 155                            |
| Promjer (mm)            | 40                             |
| Dodatni pribor          | LID16949--                     |
| Potrebni pribor         | LID12540--;                    |
| ØxV mm                  | 65x155                         |
| OTVOR mm                | Ø 55                           |

**Mjerne skice: Mizar LED 12W, 1020lm, 3000K, IP20, 36°, bijele b.**

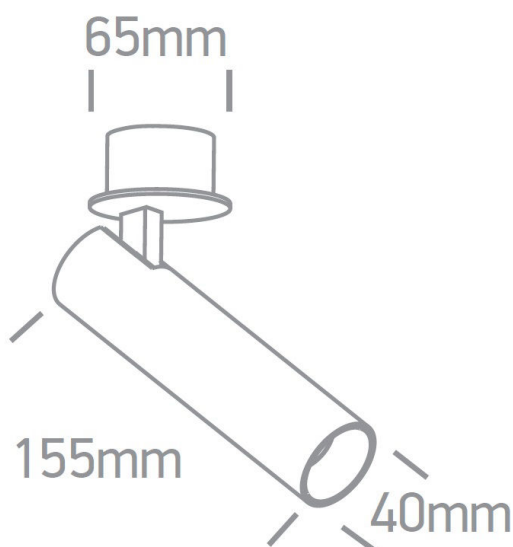

## Tabela artikla

| OPIS                                                                                                         | KAT. BROJ |
|--------------------------------------------------------------------------------------------------------------|-----------|
| Mizar LED 12W, 1020lm, 3000K, IP20, 36°, bijele b.<br>ugradni zakretni spot reflektor, potreban 350mA driver | LID15433  |
| <b>Potrebni pribor</b>                                                                                       |           |
| LED Driver 350mA, 7-15W<br>23 DRIVERS                                                                        | LID12540  |
| <b>Dodatni pribor</b>                                                                                        |           |
| Konektor 32A 2x3-port<br>26 ACCES&GADGETS                                                                    | LID16949  |