

Tehnički list za artikl: LID15434--

Mizar LED 12W, 1020lm, 3000K, IP20, 36°, crne b.

ugradni zakretni spot reflektor, potreban 350mA driver



Info o proizvodu

12W COB LED recessed adjustable spot, black with brass reflector for general lighting applications. Requires 350mA constant current LED driver. Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci

Svjetlosni tok (lm)	1020
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥90
Dimabilno	Ovisi o driveru Da
Klasa zaštite	III
IP stupanj zaštite	IP20
Vrsta svjetiljke	Stropne ugradne svjetiljke
inkl.rasvjetno tijelo	da
Grlo	LED Platine
Kut svjetlosti (°)	36
Efikasnost sustava (lm/W)	85

Tehnički podaci - nastavak

Snaga (W)	12
Pogonski uređaj	Needs to be ordered separately
Pogonska struja mA (mA)	350
Ulazna struja (A)	0,35
Način montaže	Stropna ugradna
Otvor (mm)	Ø 55
Ugradna dubina (mm)	50
Boja	crna
Materijal	Aluminij
Visina (mm)	155
Promjer (mm)	40
Dodatni pribor	LID16949--
Potrebni pribor	LID12540--;
ØxV mm	65x155
OTVOR mm	Ø 55

Mjerne skice: Mizar LED 12W, 1020lm, 3000K, IP20, 36°, crne b.

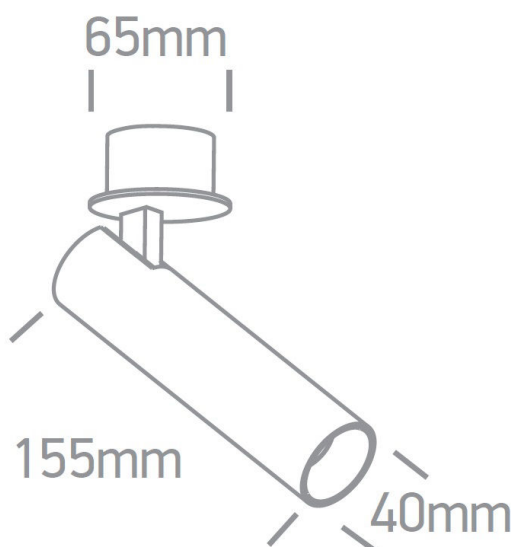


Tabela artikla

OPIS	KAT. BROJ
Mizar LED 12W, 1020lm, 3000K, IP20, 36°, crne b. ugradni zakretni spot reflektor, potreban 350mA driver	LID15434
Potrebni pribor	
LED Driver 350mA, 7-15W 23 DRIVERS	LID12540
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949