

Tehnički list za artikl: LID15489--

Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m

potreban 24V DC driver



Info o proizvodu

Slim Flexible LED light strip, with SMD2110 LEDs, 700LEDs/meter, 24W/meter. Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing. Can be cut every 1 cm (7-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci

Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥90
Dimabilno	Ovisi o driveru Da
Klasa zaštite	III
IP stupanj zaštite	IP20
KEU	F
Energetska klasa	F
Vrsta svjetiljke	LED traka
inkl.rasvjetno tijelo	da
Grlo	LED Platine

Tehnički podaci - nastavak

Efikasnost sustava (lm/W)	85
Pogonski uređaj	Needs to be ordered separately
Radni napon DC (V)	24
Ulazni napon DC (V)	24
Način montaže	Podna Stropna nadgradna Zidna nadgradna
Dodatni pribor	LID16949--
Svjetlosni tok /m (lm/m)	2050

Mjerne skice: Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m

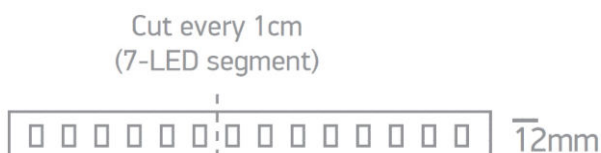


Tabela artikla

OPIS	KAT. BROJ
Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m potreban 24V DC driver	LID15489
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949