

Tehnički list za artikl: LID17436--

Sutil Round2 LED 3W 240lm 3K/4K/5,7K IP20 230V 120° bijela

Ugradna svjetiljka, komplet s driverom



Info o proizvodu

CCT Variable 3W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 300mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Tehnički podaci

Neto visina (mm)	22,00
Neto promjer (mm)	85,00
Neto masa (kg)	0,14
Vrsta svjetiljke	Stropne ugradne svjetiljke
Boja	bijela
Materijal	Akril Aluminij tlačni lijev
Pokrov	Akril
Kut svjetlosti (°)	120°
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Pogonska struja mA (mA)	300

Tehnički podaci - nastavak

Ulazna struja (A)	0,30
Grlo	LED Platine
Efikasnost sustava (lm/W)	80
Snaga (W)	3
Boja svjetla	Hladno bijela Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000 5700
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	240
Životni vijek	36.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Ugradna dubina (mm)	50
inkl.rasvjetno tijelo	da
Promjer (mm)	85
ØxV mm	85x22
Otvor (mm)	Ø 70
OTVOR mm	Ø 70

Mjerne skice: Sutil Round2 LED 3W 240lm 3K/4K/5,7K IP20 230V 120° bijela

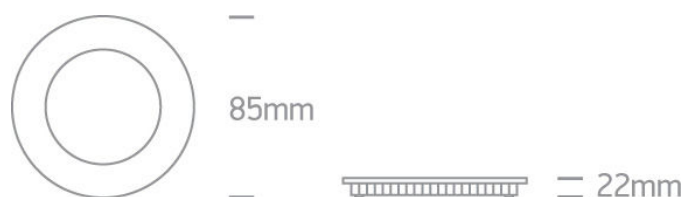

OPIS	KAT. BROJ
Sutil Round2 LED 3W 240lm 3K/4K/5,7K IP20 230V 120° bijela	LID17436
Ugradna svjetiljka, komplet s driverom	