

Tehnički list za artikl: LID17584--

Ringo 3 LED 65W 3550lm 830 dim 230V IP20

crna

TRIAC, promjer 400mm, 600mm, 800mm



Info o proizvodu

65W LED pendant, suitable for residential and commercial applications. Complete with 2 x dimmable drivers. Complies with standard EN60598-1 and any other specific standards.


Tehnički podaci

Neto visina (mm)	1.500,00
Neto promjer (mm)	800,00
Vrsta svjetiljke	Pribor
Način montaže	Pribor
Boja	crna
Materijal	Aluminij
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Grlo	LED Platine
Efikasnost sustava (lm/W)	73
Snaga (W)	65
Boja svjetla	Toplo bijela

Tehnički podaci - nastavak

Temperatura boje (K)	3000
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	4800
Dimabilno	Da
Klasa zaštite	I
IP stupanj zaštite	IP20
Promjer (mm)	400+600+800
ØxV mm	800x1500

Mjerne skice: Ringo 3 LED 65W 3550lm 830 dim 230V IP20 crna

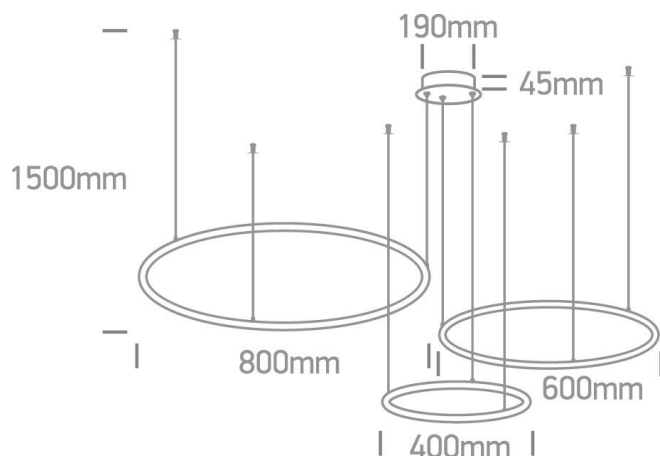

OPIS	KAT. BROJ
Ringo 3 LED 65W 3550lm 830 dim 230V IP20 crna TRIAC, promjer 400mm, 600mm, 800mm	LID17584