


Tehnički list za artikl: LIG5L02221

Avenida Pole LED 7,5W 660lm 740 IP66 IK09 1000mm, grafit

rasvjetni stupić, rotosimetrična optika



Krivulja raspodjele svjetla




Tehnički podaci

Neto visina (mm)	1.000,00
Neto promjer (mm)	150,00
Neto masa (kg)	9,70
Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	50

Tehnički podaci - nastavak

Način montaže	Podna
Boja	grafit
Materijal	Aluminij tlačni ljev
Radni napon AC (V)	220-240
Grlo	LED Platine
Snaga (W)	10,50
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000
Faktor uzvrata boje	≥70
Svjetlosni tok (lm)	850
Životni vijek	96.000h / L80 / B10
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP66
inkl.rasvjetno tijelo	da
Promjer (mm)	150
ØxV mm	150x1000
Broj svjetiljki po osiguraču B16	50

Mjerne skice: Avenida Pole LED 7,5W 660lm 740 IP66 IK09 1000mm, grafit

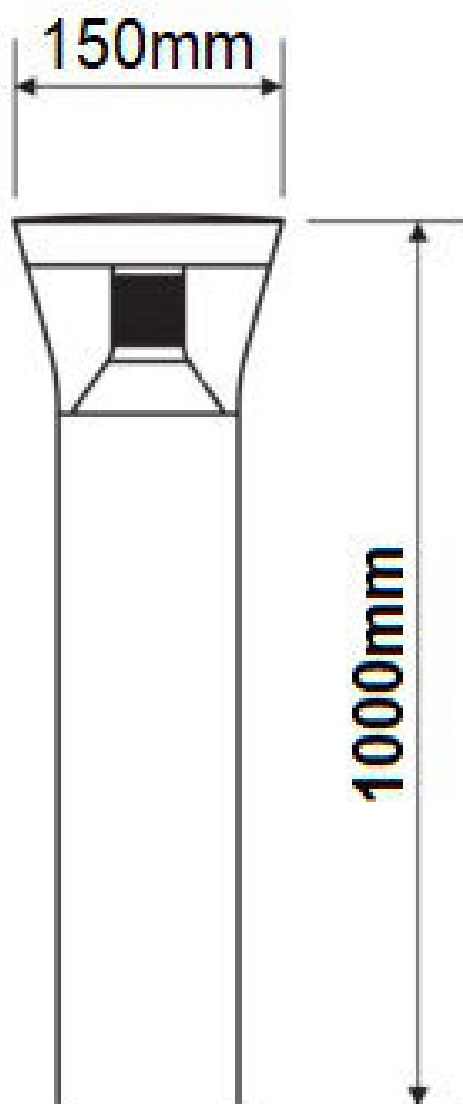

Avenida Pole LED 7,5W 660lm 740 IP66 IK09 1000mm, grafit
rasvjetni stupić, rotosimetrična optika

LIG5L02221