

Tehnički list za artikl: LILE0128--

Elegance Shine 24/ 18/ 10W 3000K/ 4000K Ra80 IP65 opal, white

Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm



Tehnički podaci

Neto visina (mm)	90,00
Neto promjer (mm)	300,00
Neto masa (kg)	2,80
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40
Vrsta svjetiljke	Surface-mounted luminaire
Način montaže	Zidna nadgradna svjetiljka Stropna nadgradna
Boja	bijela
Materijal	Akrilno staklo Akril
Pokrov	Opal
Kut svjetlosti (°)	120°
Radni napon AC (V)	220-240

Tehnički podaci - nastavak

Pogonska struja mA (mA)	100
	50
	75
Efikasnost sustava (lm/W)	125
	128
	130
Snaga (W)	24
	18
	10
Boja svjetla	Neutralno bijela
	Toplo bijela
Temperatura boje (K)	4000
	3000
Faktor uzvrata boje	80
Svjetlosni tok (lm)	1300
	2300
	3000
Dimabilno	Da, sa optimalnim, dimabilnim driverom
Klasa zaštite	I
IP stupanj zaštite	IP65
Otpornost na udarce	IK10
Promjer (mm)	300
ØxV mm	300x90

Mjerne skice: Elegance Shine 24/18/10W 3000K/4000K Ra80 IP65 opal, white

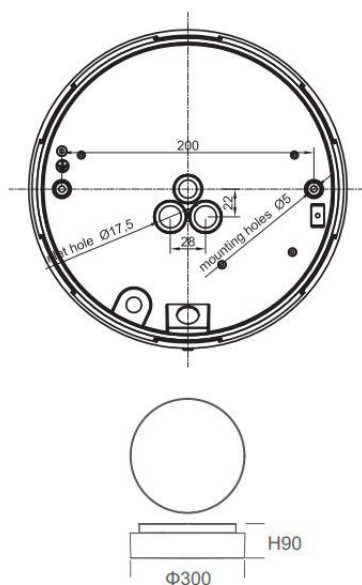


Tabela artikla

OPIS	KAT. BROJ
Elegance Shine 24/18/10W 3000K/4000K Ra80 IP65 opal, white	LILE0128
Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm	
Dodatni pribor	
	DALI-M