



Tehnički list za artikl: LILE0130--

Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--



Krivulja raspodjele svjetla




Tehnički podaci

Neto visina (mm)	79,00
Neto promjer (mm)	320,00
Neto masa (kg)	2,45
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40
Način montaže	Zidna nadgradna svjetiljka Stropna nadgradna
Boja	bijela RAL 9016
Materijal	PMMA Aluminij
Faktor zasjenjivanja	19
Radni napon AC (V)	220-240
Radni napon DC (V)	216 260 240 186
Efikasnost sustava (lm/W)	120
Snaga (W)	24 18 10
Boja svjetla	Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000
Faktor uzvrata boje	90
Svjetlosni tok (lm)	1200 2880 2160
Životni vijek	50000
Klasa zaštite	I
IP stupanj zaštite	IP20
Energetska klasa	D
Otpornost na udarce	IK06

Tehnički podaci - nastavak

Promjer (mm)	320
ØxV mm	320x79

Mjerne skice: Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white

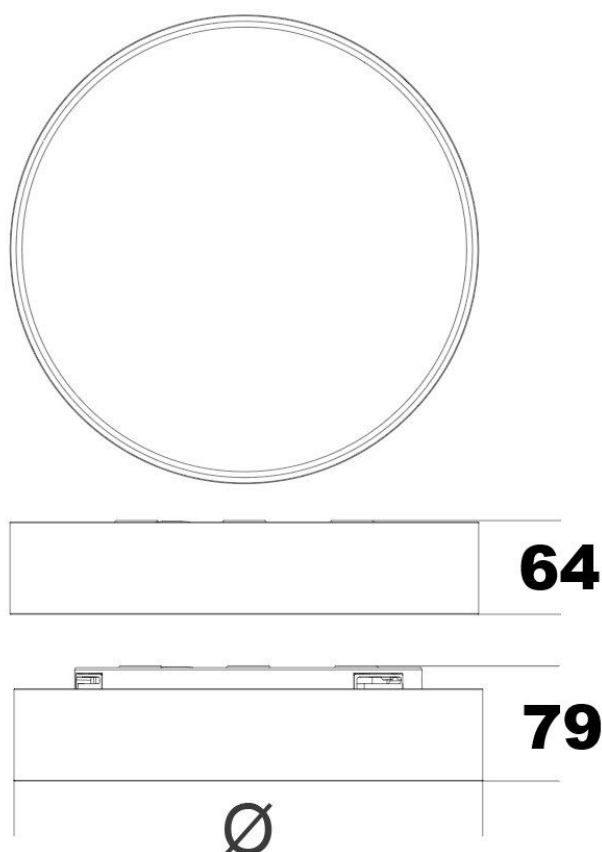

OPIS	KAT. BROJ
Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off white Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--	LILE0130